

A 3D CAD model of a mechanical assembly, likely a pump or motor component, rendered in a light gray color. The model features a central cylindrical body with a large circular opening at the top, a smaller circular opening on the side, and a flange at the bottom. A long, thin, cylindrical shaft extends from the bottom of the main body, ending in a circular flange. The background is white, and the model is shown from a perspective view.

Chapter 2

Drawing Sketches for Solid Models

Learning Objectives

After completing this chapter, you will be able to:

- *Start NX and create a new file in it*
- *Invoke different NX environments*
- *Understand the need of datum planes*
- *Create three fixed datum planes*
- *Create sketches in the Modeling environment*
- *Create sketches in the Sketch task environment*
- *Use various drawing display tools*
- *Understand different selection filters*
- *Select and deselect objects*
- *Use various sketching tools*
- *Use different snap point options*
- *Delete sketched entities*
- *Exit the Sketch environment*

INTRODUCTION

Most designs created in NX consist of sketch-based features and placed features. A sketch is a combination of two-dimensional (2D) entities such as lines, arcs, circles, and so on. The features such as extrude, revolve, and sweep that are created by using 2D sketches are known as sketch-based features. The features such as fillet, chamfer, thread, and shell that are created without using a sketch are known as placed features. In a design, the base feature or the first feature is always a sketch-based feature. For example, the sketch shown in Figure 2-1 is used to create the solid model shown in Figure 2-2. In this model, the fillets and the chamfers are the placed features.

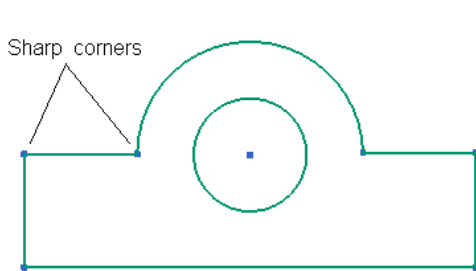


Figure 2-1 Profile for the sketch-based feature of the solid model shown in Figure 2-2

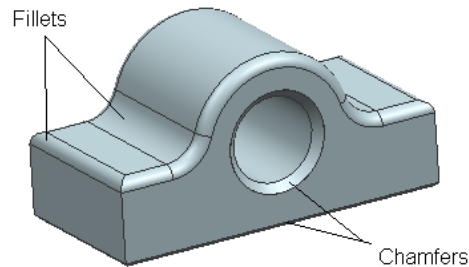


Figure 2-2 Solid model created using the sketch-based and placed features

As mentioned earlier, to create sketch-based features, you first need to create its sketch. In NX, you can create a sketch by using two methods: Direct sketch and Sketch in Task. In direct sketch method, you can create sketch, as required, directly in the Modeling environment by using the sketching tools such as **Line** and **Rectangle** of the **Direct Sketch** group. Once the sketch has been drawn, you can directly use the solid modeling tools to convert the sketch into a sketch-based feature.

In Sketch in Task method, you need to invoke the sketching environment by using the **Sketch in Task Environment** tool for creating the sketch. The **Sketch in Task Environment** tool is available in the **Curve** tab of the **Ribbon**. You will learn more about creating sketches by using these methods later in this chapter.

Unlike other solid modeling software packages where you need to use separate files for starting different environments, NX uses only a single type of file to start different environments. In NX, files are saved in the *.prt* format and all the environments required to complete a design can be invoked in the same *.prt* file. For example, you can draw sketches and convert them into features, assemble other parts with the current part, and generate drawing views in a single *.prt* file.



Note

You need to customize the NX10.0 icon from the Start menu of Windows.

STARTING NX

You can start NX by double-clicking on its shortcut icon on the desktop of your computer. The default initial interface of NX is shown in Figure 2-3 and it displays basic information about NX. You can view more information by moving the cursor over the topics displayed on the left of the NX screen.

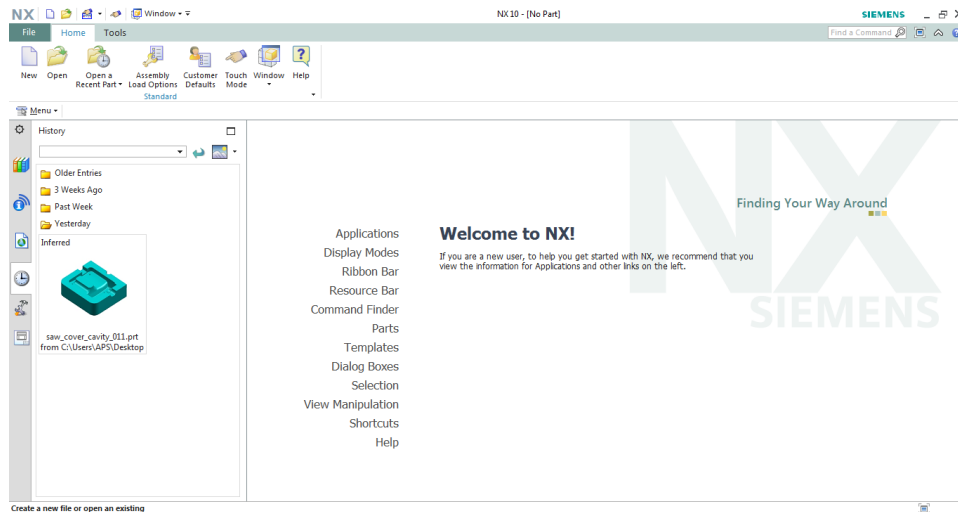


Figure 2-3 The default initial interface of NX



Tip

It is advised to read the information on the default initial screen of NX whenever you start a new session.



Note

In this textbook, the following settings have been used:

1. In this release, by default, the user interface theme is set to **Light**. However, in this textbook the **Classic Theme** has been used. To change interface theme to **Classic Theme**, choose **Menu > Preferences > User Interface** from the **Top Border Bar**; the **User Interface Preferences** dialog box will be displayed. Now, expand the **NX Theme** group from the **Theme** node available in the dialog box. Next, select the **Classic** option from the **Type** drop-down list and choose the **OK** button.
2. To change the **Default Presentation of Dialog Content** of any dialog box, choose **Menu > Preferences > User Interface** from the **Top Border Bar**; the **User Interface Preferences** dialog box will be displayed. Next, select the **Options** node available at the left of the dialog box; the **Dialog Boxes** group will be displayed. Now, select the **More** radio button the **Default Presentation of Dialog Content** area and choose the **OK** button.
3. To change the color of curves and dimensions, choose **Menu > Preferences > Sketch** from the **Top Border Bar**; the **Sketch Preferences** dialog will be displayed. Next, choose the **Part Settings** tab to change the color of curves and dimensions.

STARTING A NEW DOCUMENT IN NX

Ribbon: Home > Standard > New
Menu: File > New



To start a new file, choose the **New** tool from the **Standard** group of the **Home** tab in the **Ribbon** or choose **Menu > File > New** available at the left on the **Top Border Bar**; the **New** dialog box will be displayed, as shown in Figure 2-4.

The tabs and options in this dialog box are discussed next.

Templates Rollout

In the **New** dialog box, templates are grouped together under various environment types such as Modeling, Drawing, Simulation, Manufacturing, Inspection, Mechatronics Concept Designer, Ship Structures, and Line Designer. The template files related to these environments are available in their respective tabs. These files are used whenever you start a new file. These template files provide a predefined set of tools with specified environment. This saves a lot of time in setting environment and displaying tools according to your requirements.

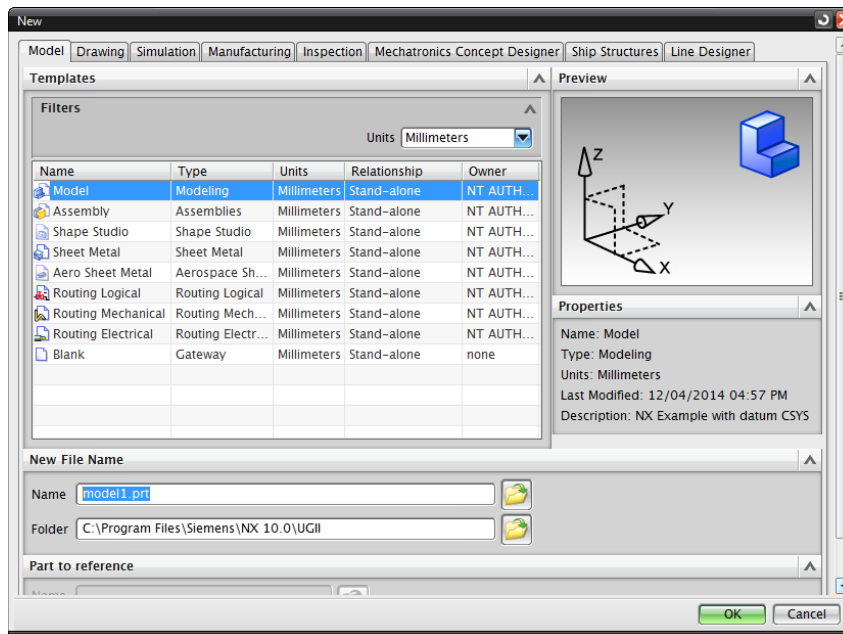


Figure 2-4 The New dialog box

Model Tab

By default, this tab will be chosen and the modeling templates will be displayed in the **Templates** rollout. Some of the important modeling templates are discussed next.

Model

By default, the **Model** template will be selected. This template is used to start a new part file in the Modeling environment for creating solid and surface models.

Assembly

The **Assembly** template is used to start a new assembly file in the Assembly environment for assembling various parts of the assembly.

Shape Studio

The **Shape Studio** template is used to start a new part file in the Shape Studio environment for creating advanced surface models.

Sheet Metal

The **Sheet Metal** template is used to start a new file in the Sheet Metal environment for creating sheet metal models.

Blank

The **Blank** template is used to start a new file in the Gateway environment. The Gateway environment allows you to examine the geometry and drawing views created. You cannot modify a model in the Gateway environment. However, you can invoke any environment of NX from it.

Drawing Tab

This tab is used to specify a template for a drawing. These templates are contained in the **Templates** rollout and are used to start a new drawing file in the Drafting environment for generating the drawing views. These templates are arranged according to the sheet size (A0, A1, A2, A3, and A4) in the **Drawing** tab.

Units

The **Units** drop-down list is used to filter the templates as per the unit. The options in this drop-down list are discussed next.

Millimeters

If you select the **Millimeters** option, the templates only with the millimeters unit will be displayed in the **Templates** area.

Inches

If you select the **Inches** option, the templates only with the inches units will be displayed in the **Templates** area.

All

Select this option to display all the templates (with both millimeters and inches units).

New File Name Rollout

This rollout is used to specify the name and location to save the file. The options in this rollout are discussed next.

Name

Enter the name of the new file in the **Name** text box. Alternatively, choose the button on the right side of the **Name** text box; the **Choose New File Name** dialog box will be displayed. Type

the name in the **File name** edit box. Also, to specify the location to save the new file, browse the folder where you need to save the file and choose the **OK** button. However, there is a separate option to specify the location, which is discussed next.

Folder

Specify the location to save the new file in the **Folder** text box. Alternatively, choose the button on the right side of the **Folder** text box; the **Choose Directory** dialog box will be displayed. Next, browse the folder where you want to save the file and choose the **OK** button.



Note

1. It is recommended that you create a folder with the name **NX** in the primary drive of your computer and then create individual folder for each chapter within the **NX** folder. Now, you can save the part files of all the chapters in their respective folders. This will ensure a better organization of the part files created.

2. In this textbook, the **Model** template has been used for starting a new file for illustration purpose.

After specifying all the required options in the **New** dialog box, choose the **OK** button; the new file will open in the specified environment. Figure 2-5 shows the initial screen of the new file invoked by using the **Model** template.

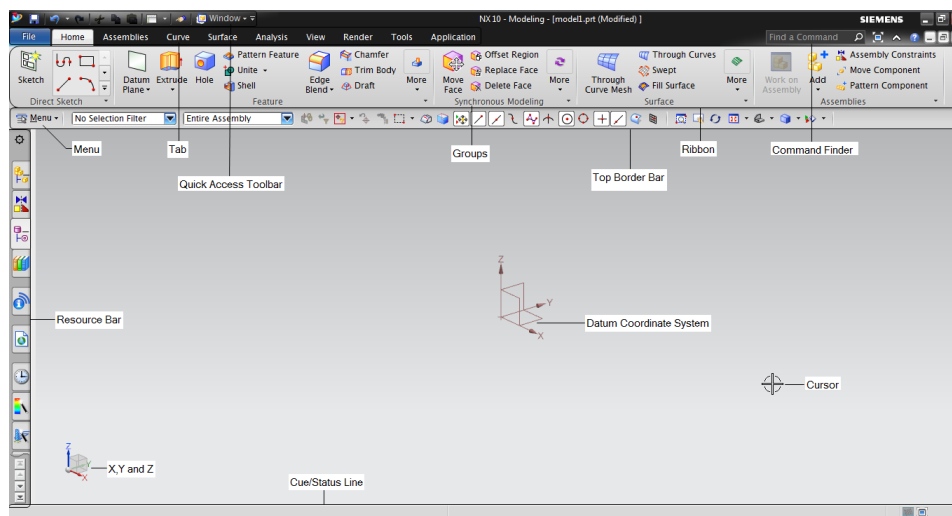


Figure 2-5 Initial screen of the new part file

INVOKING DIFFERENT NX ENVIRONMENTS

You can invoke different environments of NX by selecting their respective template from the **New** dialog box. In NX, you can also switch from one environment to another. To do so, choose the **File** tab from the **Ribbon**; a menu will be displayed, see Figure 2-6. Now, you can invoke the desired environment by selecting the required environment option from the **Applications** area of the menu. Note that the environment currently opened will not be listed in the **Applications** area of this menu.

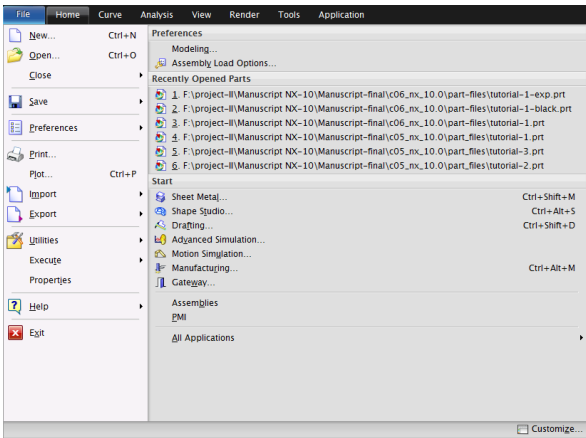


Figure 2-6 Menu showing different environments of NX

CREATING THREE FIXED DATUM PLANES (XC-YC, YC-ZC, XC-ZC)

Ribbon: Home > Feature > Datum/Point Drop-down > Datum Plane
Menu: Insert > Datum/Point > Datum Plane

In NX, you can create the sketch of the base feature by selecting a reference plane of the datum coordinate system as a sketching plane. In addition to selecting a plane of the coordinate system, you can also create three fixed datum planes (YC-ZC, XC-ZC, and XC-YC) and then use one of them as the sketching plane for creating the sketch of the base feature. To create three fixed datum planes, choose **Menu > Insert > Datum/Point > Datum Plane** available at the left on the **Top Border Bar**. Alternatively, choose the **Datum Plane** tool from the **Feature** group of the **Ribbon**; the **Datum Plane** dialog box will be displayed, as shown in Figure 2-7. Next, select the **YC-ZC Plane** option from the drop-down list in the **Type** rollout; a preview of the plane will be displayed in the drawing window. Choose the **Apply** button; the YC-ZC plane will be created. Similarly, select the **XC-ZC Plane** and **XC-YC Plane** options from the drop-down list in the **Type** rollout to create the XC-ZC and XC-YC planes, respectively. Figure 2-8 shows the three fixed datum planes created.

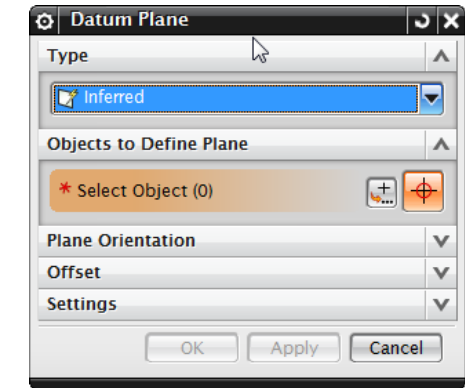


Figure 2-7 The Datum Plane dialog box

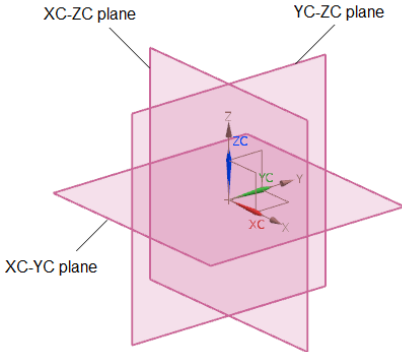


Figure 2-8 Three fixed datum planes

**Tip**

By default, all the tools are not available in their respective groups. Therefore, you may need to customize the group to add those tools that are not available by default. To customize a group, click on the down arrow at the bottom right corner of the group; a drop-down with a list of tools/options will be displayed. Click on the tool to be added or removed from the group. Note that a tick mark available on left of a tool name indicates that it is already added in the group.

Similarly, you can add or remove the groups from the **Ribbon** by using **Ribbon Options** arrow available at the bottom right most corner of the **Ribbon**.

DISPLAYING THE WCS (WORK COORDINATE SYSTEM)

Ribbon: Tools > Utilities > More Gallery > Display WCS (Customize to Add)



The display of WCS (Work Coordinate System) is important in selecting the planes for drawing sketches. When you start a new file, by default, the display of WCS is turned on. It is recommended to keep the display of WCS turned on while drawing sketches and creating features.

If the display of WCS is turned off, then to turn it on, choose the **Display WCS** tool from the **More** gallery of the **Utilities** group of the **Tools** tab in the **Ribbon**; the WCS will be displayed at the origin of the drawing window. Figure 2-9 shows the WCS with the datum coordinate system hidden for better visualization. The **Display WCS** tool is the toggle button. Choose this tool again to turn off the display of WCS.




Figure 2-9 The WCS (Work Coordinate System)

CREATING SKETCHES

In NX, you can create the sketch of a feature by using two methods. In the first method, you can create sketch in the Modeling environment directly by invoking the sketch tools available in the **Direct Sketch** group. In the second method, you need to invoke the sketching environment by choosing the **Sketch in Task Environment** tool from the **Curve** tab of the **Ribbon**. Both these methods are discussed next.

Creating Sketches in the Modeling Environment

Ribbon: Home > Direct Sketch > Sketch



As mentioned earlier, the base feature or the first feature in a design is always a sketch-based feature. The profiles of the sketch-based features are defined by using a sketch. Therefore, to create the base feature, first you need to create a sketch.

In NX, you can create a sketch by using the datum coordinate system plane (XC-YC, YC-ZC, or XC-ZC), any reference plane, or the existing face of the model.

To create a sketch in the Modeling environment, you can use the sketching tools available in the **Sketch Curve** gallery of the **Direct Sketch** group and create sketch directly in the modeling

environment itself. However, by default, in the Modeling environment, all the sketching tools are not available. To get the full access of sketching tools in the modeling environment, choose the **Sketch** tool from the **Direct Sketch** group of the **Home** tab; the **Create Sketch** dialog box will be displayed, as shown in Figure 2-10. Also, you will be prompted to select an object for the sketch plane or select a sketch axis to orient in the prompt area above the drawing window. The options in the various rollouts of the **Create Sketch** dialog box are discussed next.



Note

Also, note that the **Direct Sketch** group will be available only when you are in the Modeling environment or Sheet Metal environment.

Sketch Type Rollout

The options in the drop-down list of this rollout are used to specify whether you want to draw the sketch on the existing plane or on a temporary plane defined on the path.

On Plane

By default, this option is selected in the drop-down list. It is used to specify the existing plane, face, or datum coordinate system plane as the sketching plane.

On Path

Select this option from the drop-down list to specify the sketch plane on the existing path. The temporary sketch plane will be created perpendicular to the path selected.

Depending upon the option selected from the drop-down list, the **Create Sketch** dialog box will be modified. The various rollouts in the modified dialog box for both the options are discussed next.

On Plane Options

By default, the rollouts related to the **On Plane** option will be displayed in the **Create Sketch** dialog box, refer to Figure 2-10. The rollouts displayed on selecting this option are discussed next.

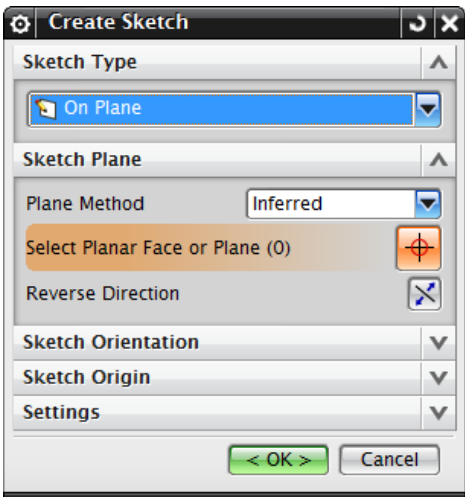


Figure 2-10 The **Create Sketch** dialog box

Sketch Plane Rollout

The options in this rollout are used to specify the sketch plane by different methods. The options in this rollout are as follows:

Plane Method

This drop down list provides various options to select the sketch plane. Some of these options are discussed below.

Inferred: By default, this option is selected in the **Plane Method** drop-down list. It allows you to select the existing plane and planar faces.

Existing Plane: Select this option to specify the existing plane or face as the sketch plane.

Create Plane: Select this option to create a new datum plane and use it as the current sketch plane. As you select this option, the **Specify Plane** area is displayed in the **Sketch Plane** rollout. The options in the **Specify Plane** area are used to create a datum plane. The options to create a datum plane are discussed in later chapter.

Create Datum CSYS: Select this option to create a new datum coordinate system.

Reverse Direction



The **Reverse Direction** button in the **Sketch Plane** rollout is used to reverse the direction of the sketching plane.

Sketch Orientation Rollout

The options in this rollout are used to specify the horizontal or vertical reference for the sketch. The sketching plane gets orientated according to the specified references. The options in this rollout are discussed next.

Reference

Select the required option (**Horizontal** or **Vertical**) from the **Reference** drop-down list to specify the reference for the sketch.

Select Reference

This button is used to specify the horizontal or vertical reference by selecting the existing planar face, edge, datum axis, or datum plane. The sketching plane gets oriented according to the specified reference. The horizontal and vertical constraints will be added to the sketch with respect to the specified reference direction.

Reverse Direction



The **Reverse Direction** button in the **Sketch Orientation** rollout is used to reverse the direction of reference specified (horizontal or vertical).

Sketch Origin Rollout

The options in this rollout are used to specify the origin point of the sketch. The options in this rollout are discussed next.

Specify Point

The options in this area are used to select the origin point of the sketch plane. You can select a point on the sketch plane to specify it as the origin of the sketch. You can also use the **Point Dialog** button or the **Inferred Point** drop-down list available in the **Specify Point** area to create or locate a point.

Settings Rollout

The options in this rollout are used to specify additional settings while selecting a sketch. The options in this rollout are discussed next.

Create Intermediate Datum CSYS

This check box is selected by default. As a result, an intermediate datum coordinate system is created and is associated to the sketch plane. Also, when you delete the sketch plane, the sketch will not be deleted.

Associative Origin

This check box is used to associate the origin point of the sketch to the sketch plane. This check box is available only when the **Create Intermediate Datum CSYS** check box is selected.

Project Work Part Origin

This check box is used to create the sketch in absolute world coordinate system.

On Path Options

Select this option from the drop-down list in the **Sketch Type** rollout to create a sketching plane on the selected path; the rollouts related to the **On Path** option will be displayed in the **Create Sketch** dialog box, as shown in Figure 2-11. The options in these rollouts are discussed next.

Path Rollout

The **Curve** button in this rollout is used to select the path. The path may be a curve or an edge of an existing solid body.

Plane Location Rollout

The options in this rollout are used to specify the location of the sketch plane along the path in terms of arc length or point. These options are discussed next.

Location

This drop-down list contains different options to specify the location of the sketch plane along the path. These options are as follows:

Arc Length: This option allows you to specify the sketch plane distance from the start point of the path. Enter the distance in the **Arc Length** edit box.

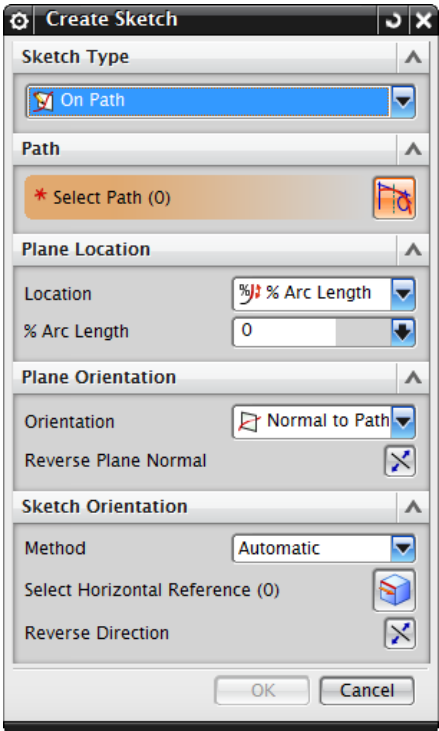


Figure 2-11 Rollouts displayed when the **On Path** option is chosen

**Note**

The nearest endpoint of the selected path will be considered as the start point of the path.

% Arc Length: This option allows you to specify the distance of the sketch plane in terms of the percentage of arc length from the start point of path. Enter the % value in the **% Arc Length** edit box.

Through Point: This option allows you to specify the sketch plane by picking a point on the path. You can use the **Point Dialog** button or **Inferred Point** drop-down list to create or locate a point.

Plane Orientation Rollout

The options in this rollout are used to specify the direction of the sketch plane with respect to the selected path. These options are discussed next.

Orientation

This drop-down list contains different options to specify the direction of the sketch plane. These options are discussed next.

Normal to Path: This option allows you to orient the sketch plane normal to the selected path.

Normal to Vector: This option allows you to orient the sketch plane normal to the specified vector. You can use the **Vector Dialog** button or the **Inferred Vector** drop-down list to create or specify the vector.

Parallel to Vector: This option allows you to specify the sketch plane parallel to the specified vector. You can use the **Vector Dialog** button or the **Inferred Vector** drop-down list to create or specify the vector.

Through Axis: This option aligns the sketch plane so that it passes through the specified axis. Specify the axis using the **Vector Dialog** button or the **Inferred Vector** drop-down list.

Reverse Plane Normal

The **Reverse Plane Normal** button is used to reverse the direction of sketch plane.

Sketch Orientation Rollout

The options in the drop-down list of this rollout are used to specify the reference for a sketch. The sketching plane will be oriented according to the specified reference. The options in this rollout are discussed next.

Method

The options in this drop-down list are used to specify references for the orientation of a sketch. These options are discussed next.

Automatic: The **Automatic** option is selected by default in this drop-down list. As a result, the **Select Horizontal Reference** button available below this drop-down list gets activated. You can specify the horizontal reference by using this button. Specify the horizontal reference for the sketch; the sketching plane will be oriented based on the specified reference.



Note

After selecting the **Automatic** option, if you select an existing curve as the path, the sketch will be oriented using the curve parameters and if you select an existing edge as the path, the sketch will be oriented relative to the face.

Relative to Face: This option allows you to orient a sketch with respect to the selected face.

Use Curve Parameters: This option allows you to orient a sketch by using curve parameters.

Reverse Direction



The **Reverse Direction** button in this rollout is used to reverse the direction of the specified reference.

All the options in the **Create Sketch** dialog box have already been discussed. For illustration purpose, select the **On Plane** option from the drop-down list. By default, the XC-YC plane will be selected. Next, choose the **OK** button from the **Create Sketch** dialog box; the selected reference plane will be oriented normal to the viewing direction, refer to Figure 2-12. Now, you can create sketch by using different sketching tools.



Tip

If the icons of the **Ribbon** appear large, you can reduce their size. To do so, right-click on **Ribbon** to display a shortcut menu and then choose the **Customize** option; the **Customize** dialog box will be displayed. Choose the **Icons/Tooltips** tab and then select the options from the **Ribbon Bar** drop-down list available in the **Icon Sizes** area.

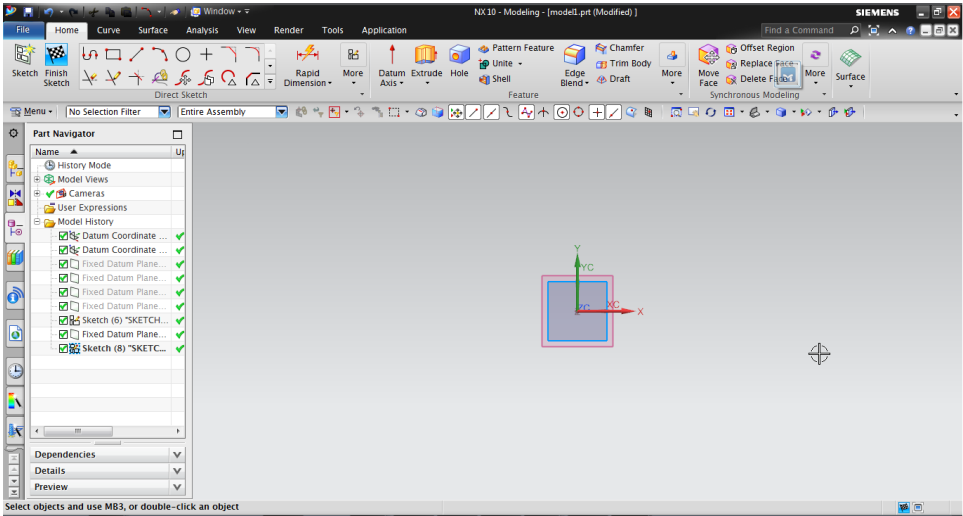


Figure 2-12 The screen appears with XC-YC plane oriented normal to the viewing direction

Creating Sketches in the Sketching Environment

In NX, you can create a sketch in the Sketching environment. You can invoke the sketching environment for creating a sketch by using the **Sketch in Task Environment** tool from the **Curve** group available in the **Curve** tab of the **Ribbon**. On choosing this tool, the **Create Sketch** dialog box will be displayed and you will be prompted to select a sketching plane. Next, select the sketching plane. Most of the options in the **Create Sketch** dialog box are same as discussed earlier; you can specify the other required parameters in the dialog box and then choose the **OK** button; the sketching environment will be invoked. Now, you can create the sketch by using the tools that are available in the Sketching environment. To finish the sketch, you need to choose the **Finish** tool from the **Sketch** group.

SKETCHING TOOLS

As discussed, the tools required to draw a sketch are available in the **Sketch Curve** gallery of the **Direct Sketch** group in the **Home** tab of the Modeling environment. Also, these tools are available in the **Home** tab of the Sketching environment. The sketching tools in context of the **Sketch Curve** gallery in the **Direct Sketch** group are discussed next.

Drawing Sketches Using the Profile Tool

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Profile
Menu: Insert > Sketch Curve > Profile



The **Profile** tool is the most commonly used tool to draw sketches in NX. This tool allows you to draw continuous lines and tangent/normal arcs. To draw continuous lines and tangent/normal arcs using this tool, choose the **Profile** tool from the **Direct Sketch** group of the **Home** tab; the **Profile** dialog box will be displayed, as shown in Figure 2-13.




Figure 2-13 The **Profile** dialog box

Also, the dynamic input boxes are displayed below the cursor and you will be prompted to select the first point of the line or press and drag the left mouse button to begin the arc creation. The dynamic input boxes allow you to enter the coordinates or the length and angle of the line. The methods of creating lines and arcs using this tool are discussed next.



Note

The **Profile** tool is also available in the **Home** tab of the Sketching environment. As a result, you can also draw continuous lines and tangent/normal arcs in the Sketching environment by using this tool.

Drawing Lines



The option to draw straight lines is active by default when you invoke the **Profile** tool. This is because the **Line** button is chosen by default in the **Profile** dialog box. NX allows you to draw lines using two methods. These methods are discussed next.

Drawing Lines by Entering Values

In this method of drawing lines, you can enter the coordinate values or the length and angle of the line in the dynamic input boxes displayed below the cursor when you invoke the **Profile** tool. After you have entered the coordinates of the start point of the line, a rubber-band line will be displayed between the cursor and the specified point. Also, you will be prompted to

select the second point of the line. On specifying the start point of the line, the dynamic input boxes will change into the length and angle modes, as shown in Figure 2-14.

This happens because the **Parameter Mode** button is automatically chosen in the **Profile** dialog box. As you move the cursor in the drawing window, the length and angle of the line gets modified, based on the relative position of the cursor with respect to the point specified earlier in the dynamic input boxes. You can draw a line by specifying its length and angle in these boxes.

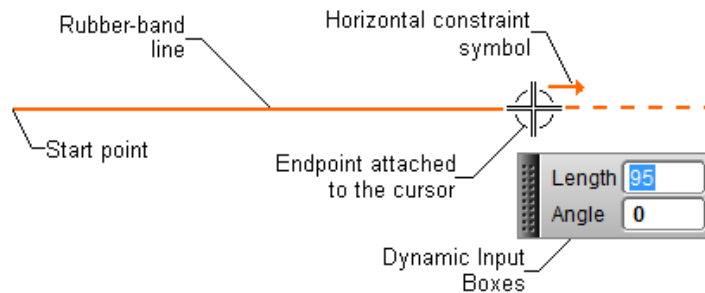


Figure 2-14 Drawing a horizontal line



Note

After specifying the start point of the line, if you choose the **Coordinate Mode** button from the **Profile** dialog box, the coordinate mode option for specifying the endpoint of the line will be restored.

The line drawing process does not end after you specify the second point of the line. Instead, another rubber-band line starts with its start point at the endpoint of the last line and the endpoint attached to the cursor. You can repeat the above-mentioned process to draw a chain of continuous lines.

After drawing a line, you will notice that it is dimensioned automatically. This happens because the **Continuous Auto Dimensioning** tool is chosen by default in the **More** gallery of the **Direct Sketch** group in the **Home** tab. You will learn more about dimensioning and constraints in the later chapters.



Tip

You can toggle between the two dynamic input boxes by pressing the **TAB** key. Note that once you specify a value in one of the boxes and press the **TAB** key; the second dynamic input box will be activated. Specify the value in the second box and then press the **ENTER** key or the **TAB** key to register the values and draw the line using these values.

Drawing Lines by Picking Points in the Drawing Window

This is the most convenient method of drawing lines and is extensively used in sketching. The parametric nature of NX ensures that irrespective of the length of the line that is drawn, you can modify it to the required values using dimensions. To draw lines using this method, invoke the **Profile** tool and pick a point in the drawing window; a rubber-band line appears. Specify the endpoint of the line by picking a point in the drawing window; another rubber-band line will appear with the start point as the endpoint of the last line and the endpoint attached to the cursor. You can continue specifying the endpoints of the lines to draw a chain of continuous lines.

While drawing a line, you will notice that some symbols are displayed on the right of the cursor. For example, after specifying the start point of the line, if you move the cursor in the horizontal direction, an arrow pointing toward the right will be displayed, refer to Figure 2-14. This arrow is the symbol of the **Horizontal** constraint that is applied to the line. This constraint will ensure that the line you draw is horizontal. These constraints are automatically applied to the sketch while drawing. You will learn more about the constraints in the later chapters.



Note

While drawing lines, you can disable the constraints temporarily by pressing the ALT key.

Drawing Arcs



The option to draw arcs can be activated by choosing the **Arc** button in the **Profile** dialog box. Alternatively, you can press and hold the left mouse button and drag the cursor to invoke the arc mode. Generally, the arcs that are drawn by using this tool are in continuation with lines. Therefore, the start point of the arc is taken as the endpoint of the last line. As a result, when you invoke the arc mode, you need to specify only the endpoint of the arc.

When you draw an arc in continuation with lines, you will notice that a circle with four quadrants will be displayed at the start point of the arc, as shown in Figure 2-15. This symbol is called the quadrant symbol and it helps you to define whether you need to draw a tangent arc or a normal arc. This symbol also helps you in specifying the direction of the arc.

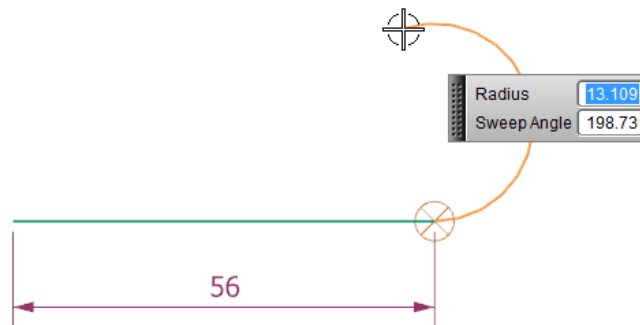


Figure 2-15 *Quadrant symbol displayed while drawing an arc using the **Profile** tool*

As evident from Figure 2-15, there are four quadrants in the quadrant symbol. The movement of the cursor in these quadrants will determine whether the arc will be tangent to the line or normal to the line. To draw a tangent arc, move the cursor to the start point of the arc and then move it in the quadrants along the line through a small distance; the tangent arc appears. Now, move the cursor to size the arc, refer to Figure 2-15.

To draw a normal arc, move the cursor through a small distance in the quadrant normal to the line; a normal arc appears. Move the cursor to resize the arc, as shown in Figure 2-16. As you invoke the arc mode, the current dynamic input boxes change into the **Radius** and **Sweep Angle** input boxes. These boxes allow you to specify the radius and the sweep angle to draw the arc.

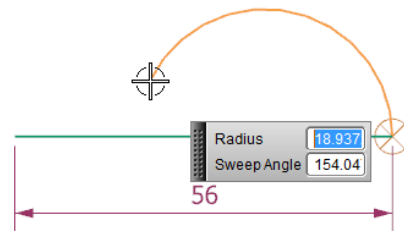


Figure 2-16 Drawing the normal arc



Tip

1. To restart drawing lines using the **Profile** tool or to break the sequence of the continuous lines, press the **ESC** key once.
2. Press the **ESC** key twice to exit the tool. Alternatively, right-click in the drawing area and choose the **OK** option from the shortcut menu.



Note

If you are not drawing the arc in continuation with a line or an arc, this tool will work similar to the **Arc by 3 Points** tool, which is discussed later in this chapter.

Using Help Lines to Locate Points

You will notice that when a sketching tool is active while drawing sketches, some dotted lines are displayed from the keypoints of the existing entities. The keypoints include endpoints, midpoints, center points, and so on. These dotted lines are called the help lines. If the help lines are not displayed automatically, move the cursor to the keypoints and then move the cursor away; the help lines will be displayed. The help lines are used to locate the points with reference to the keypoints of the existing entities. Figure 2-17 shows the use of the help lines to locate the start point of a new line. You can temporarily disable the help lines by pressing the **ALT** key.

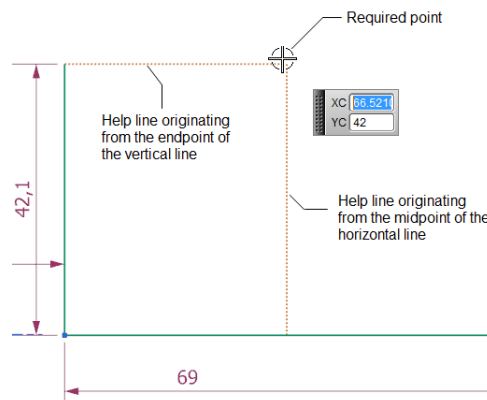


Figure 2-17 Using the help lines to locate a point

Drawing Individual Lines

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Line
Menu: Insert > Sketch Curve > Line



NX also allows you to draw individual lines. This can be done using the **Line** tool. The working of this tool is similar to the working of the line mode of the **Profile** tool. The only difference is that this tool allows you to draw only one line. As a result, after you specify the endpoint of the line, no rubber-band line is displayed. Instead, you are prompted to specify the first point of the line. You can specify the first point and the second point of the lines by picking points on the screen or by entering values in the dynamic input boxes. You can use this tool to draw as many individual lines as required.



Note

*Similar to the **Profile** tool, other sketching tools such as **Line** and **Rectangle** are also available in the Sketch in Task environment.*

Drawing Arcs

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Arc
Menu: Insert > Sketch Curve > Arc



NX allows you to draw arcs using two methods. You can select a method by choosing its respective button from the **Arc** dialog box that will be displayed when you invoke the **Arc** tool. The methods of drawing arcs are discussed next.

Drawing Arcs Using Three Points



In this method, you can draw an arc by specifying its start point, endpoint, and a point on the arc. When you invoke the **Arc** tool, this method is activated by default and you will be prompted to specify the start point of the arc. You can specify the start point by clicking in the drawing window or by entering the coordinates in the dynamic input boxes. After specifying the start point of the arc, you will be prompted to specify the endpoint. You can also specify the radius of the arc by entering its value in the dynamic input box.

Note that the next prompt will depend on how you specify the endpoint. If you specify the endpoint of the arc by clicking a point in the drawing window, you will be prompted to select a point on the arc and the **Radius** dynamic input box will be displayed. However, if you specify the radius of the arc in the dynamic input box after specifying the start point, then you will be prompted to specify the endpoint of the arc. You can click anywhere in the drawing window to draw the arc. Figure 2-18 shows a three-point arc being drawn by specifying two endpoints and a point on the arc.



Tip

While drawing an arc by specifying its three points, if the start point is at the endpoint of an existing entity, the resultant arc can be drawn tangent to the selected entity. To do so, while defining the point on the arc, move the cursor such that the resulting arc is tangent to the selected entity.

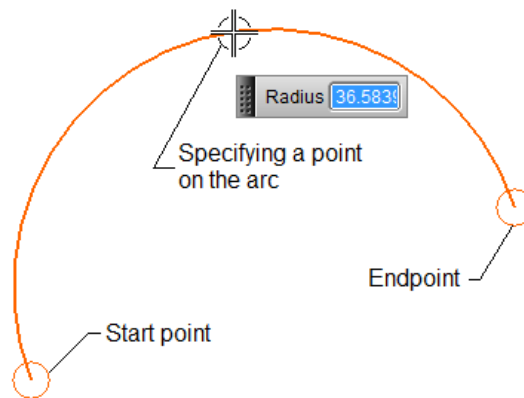


Figure 2-18 Drawing a three-point arc

Drawing an Arc by Specifying its Center Point and Endpoints



In this method, you can draw an arc by specifying its center point, start point, and endpoint. To invoke this method, choose the **Arc by Center and Endpoints** button from the **Arc** dialog box; you will be prompted to specify the center point of the arc. Specify the center point of the arc by clicking in the drawing area or by entering coordinates in the dynamic input boxes. On doing so, you will be prompted to specify the start point of the arc. After specifying the start point of the arc, you will be prompted to specify the endpoint of the arc. Note that when you specify the start point of the arc after specifying the center point, the radius of the arc will automatically be defined. Therefore, the endpoint is used only to define the arc length. Figure 2-19 shows an arc being drawn using this method.



Tip

After specifying the center point of the arc, you can also specify its radius and the sweep angle in the dynamic input boxes. In this case, you will be prompted to specify the start point and then the endpoint of the arc. The endpoint will define the direction of the arc.

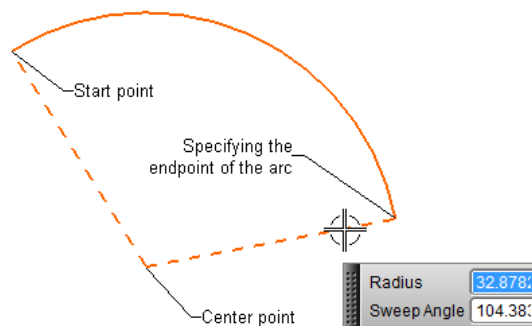


Figure 2-19 Drawing an arc by specifying its center, start, and end points

Drawing Circles

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Circle
Menu: Insert > Sketch Curve > Circle



In NX, you can draw circles using two methods. These methods can be activated by choosing their respective buttons from the **Circle** dialog box that are displayed when you invoke the **Circle** tool. The methods of drawing circles are discussed next.

Drawing a Circle by Specifying the Center Point and Diameter



This is the default and most widely used method of drawing circles. In this method, you need to specify the center point of a circle and a point on the circumference of the circle.

The point on the circumference of the circle defines the radius or the diameter of the circle. To draw a circle using this method, choose the **Circle by Center and Diameter** button from the **Circle** dialog box; you will be prompted to specify the center point of the circle. Specify the center point of the circle in the drawing window. Next, you will be prompted to specify a point. Specify a point to define the radius. Alternatively, you can enter the value of the diameter in the dynamic input box. Figure 2-20 shows a circle being drawn by using this method.

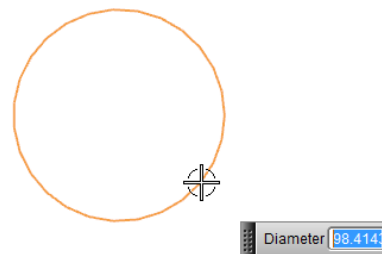


Figure 2-20 A circle drawn using the *Circle by Center and Diameter* method



Tip

After specifying the center point of the circle, if you specify the value of diameter in the dynamic input box, the circle of the specified diameter will be created. Also, a preview of the circle of the same diameter will be attached to the cursor. Now, you can place multiple copies of the circle by specifying the center point.

Drawing a Circle by Specifying Three Points



In this method, the circle is drawn by specifying three points on circumference. To invoke this method, choose the **Circle by 3 Points** button from the **Circle** dialog box; you will be prompted to specify the first point of the circle. This point is actually the first point on the circumference of the circle. After specifying the first point, you will be prompted to specify the second point of the circle. On specifying these two points, small reference circles will be displayed on these two points, as shown in Figure 2-21. Now, specify the third point, which is a point on the circle. You can also enter its diameter value in the **Diameter** input box. If you enter the diameter of the circle in the **Diameter** input box, you need to click in the drawing window to specify the placement point for the circle. This completes the creation of the circle.

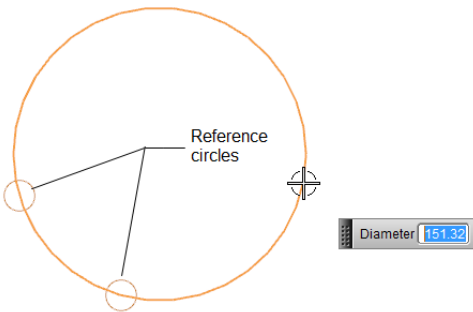


Figure 2-21 Circle drawn by using the 3 Points method

Drawing Rectangles

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Rectangle
Menu: Insert > Sketch Curve > Rectangle



In NX, you can draw rectangles by using three methods. These methods can be used by choosing their respective buttons from the **Rectangle** dialog box. To invoke this dialog box, choose the **Rectangle** tool from the **Direct Sketch** group. The three methods of drawing rectangles are discussed next.

Drawing Rectangles by Specifying Corners



The **By 2 Points** method is used to draw a rectangle by specifying the diagonally opposite corners of rectangle. When you invoke the **Rectangle** tool, the **By 2 Points** button is chosen by default in the **Rectangle Method** area of the **Rectangle** dialog box. Also, you will be prompted to specify the first point of the rectangle. This point will work as one of the corners of the rectangle. After specifying the first point, you will be prompted to specify the point to create the rectangle. This point will be diagonally opposite to the point that you have specified earlier. You can click anywhere on the screen to specify the second corner or enter the width and height of the rectangle in the dynamic input boxes. Figure 2-22 shows a rectangle being drawn by using the **By 2 Points** method.

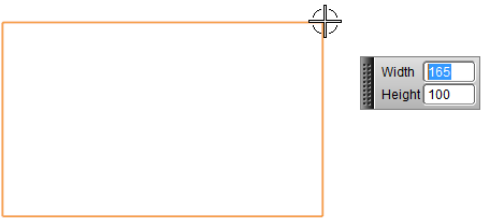


Figure 2-22 Rectangle being drawn by using the **By 2 Points** method



Tip
If you specify the width and height of a rectangle in the dynamic input boxes after specifying the first point, a preview of the rectangle with the specified width and height will be attached to the cursor. Now, you need to specify a point to define the direction of rectangle.

Drawing Three Points Rectangles



You can draw a three points rectangle by choosing the **By 3 Points** button from the **Rectangle** dialog box. In this method, you can draw a rectangle using three points. The first two points are used to define the length and angle of one of the sides of the rectangle and the third point is used to define the height of the rectangle. When you invoke this tool, you will be prompted to specify the first point of the rectangle. Once you specify the first point, you will be prompted to specify the second point of the rectangle. Both these corners are along the same direction. Therefore, these points define the length and orientation of the rectangle. Note that if you specify the second point at a certain angle, the resulting rectangle will also be at an angle. After specifying the second point, you will be prompted to specify a point to create the rectangle. This point is used to define the height of the rectangle. After specifying the first point, you can also specify the height, width, and the angle of the rectangle in the dynamic input boxes. Figure 2-23 shows an inclined rectangle drawn by using the **By 3 Points** method.

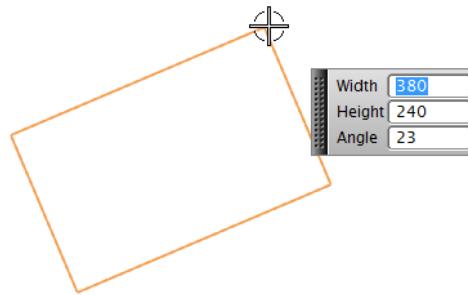


Figure 2-23 Inclined rectangle drawn by using the **By 3 Points** method



Tip

*After specifying the first point of a rectangle, you can toggle between the **By 2 Points** and **By 3 Points** buttons by dragging the left mouse button.*

Drawing Centerpoint Rectangles



You can draw a centerpoint rectangle by choosing the **From Center** button in the **Rectangle** dialog box. Using this method, you can draw a rectangle using three points. However, the first point is taken as the center of the rectangle in this case. When you invoke this tool, you will be prompted to specify the center point of the rectangle. Once you specify the center point, you will be prompted to specify the second point of the rectangle. Both these points are along the same direction. Therefore, these points define the width of the rectangle. Note that if you specify the second point at a certain angle, the resulting rectangle will also be at an angle. After specifying the second point, you will be prompted to specify a point to create the rectangle. This point is used to define the height of the rectangle. Alternatively, you can specify the height, width, and angle of the rectangle in the dynamic input boxes which appear after you specify the first point for creating the rectangle.

Placing Points

Ribbon:
Menu:

Home > Direct Sketch > Sketch Curve Gallery > Point
Insert > Datum/Point > Point



In NX, you can place points by clicking in the drawing window. To place a point, choose the **Point** tool from the **Direct Sketch** group; the **Sketch Point** dialog box will be displayed, refer to Figure 2-24, and you will be prompted to select a point. Click in the drawing window; the point will be placed at the specified location. Also, the horizontal and vertical dimensions between the point and the origin point of the sketch will be displayed. You can edit these dimensions to change the location of the point.



Tip
*If tools to be invoked are not visible by default in the **Direct Sketch** group of the **Home** tab, you need to expand the **Sketch Curve** gallery of the **Direct Sketch** group. To expand the **Sketch Curve** gallery, click on the down arrow available at the lower right corner in the **Direct Sketch** group.*

You can also place a point by using the **Point** dialog box. To invoke this dialog box, choose the **Point Dialog** button from the **Sketch Point** dialog box; the **Point** dialog box will be displayed, refer to Figure 2-25 and you will be prompted to select the object to infer point. This dialog box contains four main rollouts, **Type**, **Point Location**, **Output Coordinates**, and **Offset**. The options in these rollouts are discussed next.

Type Rollout

This rollout has a drop-down list from which you can select a method to specify the location for the resulting point. Click on the drop-down list; the options for placing a point will be displayed. These options are discussed next.

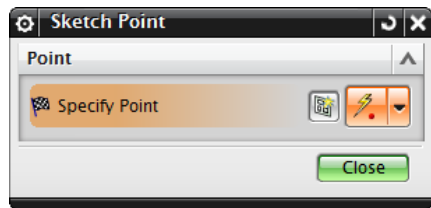


Figure 2-24 The **Sketch Point** dialog box

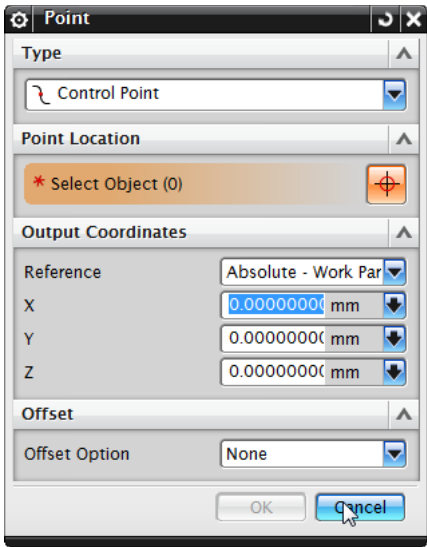


Figure 2-25 The **Point** dialog box

Inferred Point

This option is selected by default. This option allows you to place a point in the drawing window. However, if there are some entities in the drawing window, then this option helps you to select the keypoints of the entity. For example, if there are a few lines in the drawing window, then this option helps you to select the endpoints or the midpoints of the lines.

Cursor Location

This option allows you to place a point at a location where you will click the cursor in the drawing window. If the **Cursor Location** option is selected, then the other entities in the drawing window will not be considered.

Existing Point

This option allows you to select the points that are already placed in the drawing window. As a result, you can place new point on top of the existing point.

End Point

This option allows you to place the point at the endpoint of the existing lines, arcs, or splines.

Control Point

This option allows you to place the point at the control point of the existing sketched entities. The control points include the endpoints and midpoints of lines or arcs, center points of circles, ellipses, control points of splines, and so on.

Intersection Point

This option allows you to place the point at the intersection point of the two existing sketched entities. To do so, select the **Intersection Point** option from the drop-down list in the **Type** rollout; you will be prompted to select the first and second intersecting entities. Specify the two intersecting entities in the drawing area; a point will be placed at the intersection point of the two existing entities.

Arc/Ellipse/Sphere Center

This option allows you to place the point at the center of an existing arc, circle, ellipse, or sphere.

Angle on Arc/Ellipse

This option allows you to place the point on the circumference of the selected arc, circle, or ellipse such that the resulting point is at the specified angle with respect to X-axis. When you choose this option, the **Point** dialog box will be modified and you will be prompted to select an arc or an ellipse. Select the arc or the ellipse in the drawing; the point will be placed on the circumference of the selected entity. Next, enter the angle value for the point in the **Angle** edit box of the **Angle on Curve** rollout.

Quadrant Point

This option allows you to place the point at the quadrant of a circle, arc, or an ellipse. The point will be placed at the quadrant that is closest to the current location of the cursor.

Point on Curve/Edge

This option allows you to place the point on the selected curve or edge. The location of the point is defined in terms of its curve parameter percentage from the start point of the curve. When you select the **Point on Curve/Edge** option, the **Point** dialog box will be modified and you will be prompted to select the curve to specify the point location. Click anywhere on the curve or the edge; you will be prompted to specify the curve parameter percentage. Next, enter the distance of the point in the **Arc Length** edit box of the **Location on Curve** rollout.

Point on Face

This option allows you to place the point on the selected face. The location of the point is defined by specifying values in the **U Parameter** and **V Parameter** edit boxes. The **U Parameter** edit box is used to specify the horizontal position of the point whereas the **V Parameter** is used to specify the vertical position of the point. The values of these edit boxes must lie between 0.0 and 1.0. As value of the **U Parameter** edit box increases, the position of the point shifts from right to left; and if the value of the **V Parameter** edit box increases, the position of the point shifts from bottom to top. Note that this option will be available only when you invoke the **Point** dialog box by choosing **Menu > Insert > Datum/Point > Point** from the **Top Border Bar** in the Modeling environment.

Between Two Points

This option allows you to create a point between two existing points or between two keypoints of an entity. When you select this option from the **Type** drop-down list, the **Point** dialog box will be modified and you will be prompted to select object to infer point. Select the first point from the drawing window; you will be prompted again to select object to infer point. Select the second point; a point will be created between the two selected points. You can change the location of this point by entering the percentage value in the **%Location** edit box of the **Location Between Points** rollout.

By Expression

This option allows you to specify a point expression by using the X, Y, and Z coordinates. When you select this option from the **Type** drop-down list, the **Point** dialog box will be modified with new rollouts such as **Choose Expression**, **Output Coordinates**, and **Offset**. The **Choose Expression** rollout is used to display the point expression created already in the part. To create a new expression, choose the **Create Expression** button; the **Expressions** dialog box will be displayed. Enter the name of the point expression in the **Name** edit box, and then edit the point formula as per your requirement in the **Formula** edit box. Once you have edited the values of the X, Y, and Z coordinates in the **Formula** edit box, the **Accept Edit** button will be available. Choose the **Accept Edit** button and then choose the **OK** button from this dialog box; the **Point** dialog box will be displayed. The newly created point expression will be listed in the **Expression** list area of the **Choose Expression** rollout. Select the point expression from the list and then choose the **OK** button from the **Point** dialog box; a point will be created with the specified coordinates in the expression.

Point Location Rollout

This rollout is used to select a point and will not be available for the **Intersection Point**, **Angle on Arc/Ellipse**, **Point on Curve/Edge**, and **Point on Face** options.

Output Coordinates Rollout

This rollout is used to enter the X, Y, and Z coordinates to specify the location of the point. Also, you can specify or determine the 3D location of the points using this rollout. You can specify the point relative to the Work Coordinate System (WCS) or Absolute Coordinate System by selecting their respective radio buttons.

Offset Rollout

This rollout is used to create a point at a specified distance from a pre-selected point. You can select an option to specify the distance of the required point from the **Offset Option** drop-down list in this rollout. The options in this drop-down list are discussed next.

Rectangular

This option allows you to create a point by specifying its X, Y, Z coordinates with respect to the pre-selected point in the **Delta X**, **Delta Y**, and **Delta Z** edit boxes, respectively.

Cylindrical

This option allows you to create a point according to the cylindrical coordinate system with respect to the pre-selected point by specifying the radius, angle, and Z direction in the **Radius**, **Angle**, and **Delta Z** edit boxes, respectively.

Spherical

This option allows you to create a point according to the spherical coordinate system with respect to the pre-selected point by specifying the Radius, Angle 1, and Angle 2 in their respective edit boxes.

Along Vector

This option allows you to create a point along the specified vector direction at a distance specified in the **Distance** edit box.

Along Curve

This option allows you to create a point on the specified curve. The distance of the point on arc can be specified by entering the **Arc Length** or **Percentage** value in the respective edit box.

Drawing Ellipses or Elliptical Arcs

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Ellipse
Menu: Insert > Sketch Curve > Ellipse



In NX, you can draw ellipses or elliptical arcs by using the **Ellipse** tool. To invoke this tool, choose **Menu > Insert > Sketch Curve > Ellipse** option from the **Top Border Bar**; the **Ellipse** dialog box will be displayed, as shown in Figure 2-26. Also, you will be prompted to select a point to specify the center point of the ellipse.



Note

By default, the **Ellipse** tool is not visible in the **Sketch Curve** gallery of the **Direct Sketch** group. You can click on the down or up arrow available on the right corner of this area to display the **Ellipse** tool and other set of sketching tools available in this gallery but not visible by default.

Select the **Point Dialog** button from the **Center** rollout; the **Point** dialog box will be displayed, refer to Figure 2-25. Using the **Point** dialog box, you can define the center point of the ellipse. Alternatively, you can define the center point of the ellipse by selecting the required option from the drop-down list available on the right of the **Point Dialog** button. After defining the center point by using the **Point** dialog box, choose the **OK** button from it; the **Ellipse** dialog box will be displayed again. Also, a preview of the ellipse will be displayed. Next, specify the major and the minor radii of the ellipse in the **Major Radius** and **Minor Radius** edit boxes in the **Ellipse** dialog box, respectively. If you want to draw an elliptical arc, clear the **Closed** check box in the **Limits** rollout; the **Ellipse** dialog box will be modified and the **Start Angle** and **End Angle** edit boxes for the arc will appear in it. You can specify the start and end angles in their respective edit boxes. Figure 2-27 shows the parameters related to an ellipse and Figure 2-28 shows the parameters related to an elliptical arc. If you want to retain the complement of the elliptical arc, choose the **Complement** button below the **End Angle** edit box in the **Limits** rollout; the preview of the complement of the elliptical arc will be displayed. Figure 2-29 shows an elliptical arc and Figure 2-30 shows the complement of the elliptical arc. Note that Figure 2-27 shows an inclined ellipse. To create an inclined ellipse, you need to enter rotation angle in the **Angle** edit box of the **Rotation** rollout. The specified angle value will be measured with respect to X-axis in the counterclockwise direction.

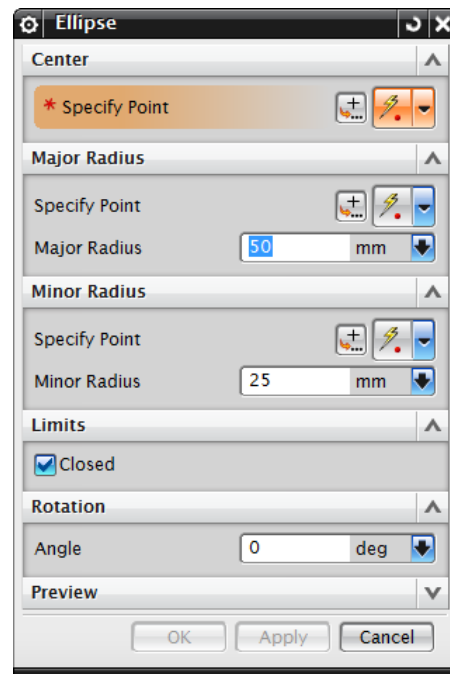


Figure 2-26 The **Ellipse** dialog box

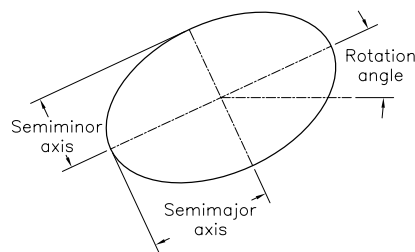


Figure 2-27 Parameters related to an ellipse




Figure 2-28 Parameters related to an elliptical arc

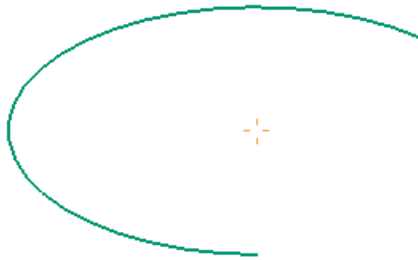


Figure 2-29 An elliptical arc



Figure 2-30 Complement of the elliptical arc shown in Figure 2-29

Drawing Conics

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Conic
Menu: Insert > Sketch Curve > Conic



The **Conic** tool allows you to create a conic section in the Sketch environment using three points. The first two points define the endpoints of the conic and the third point defines the apex of the conic. Also, you need to specify the projective discriminant value, termed as rho value. To invoke the **Conic** tool, choose **Menu > Insert > Sketch Curve > Conic** from the **Top Border Bar**; the **Conic** dialog box will be displayed, as shown in Figure 2-31. In this dialog box, you can specify the start point and endpoint of the conic using the options in the **Limits** rollout. After specifying the start point and the endpoint of the conic, you need to specify the apex of the conic by using the options in the **Specify Control Point** area of the **Control Point** rollout. Next, enter the Rho value in the **Value** edit box. This Rho value will define the exact shape of conics.

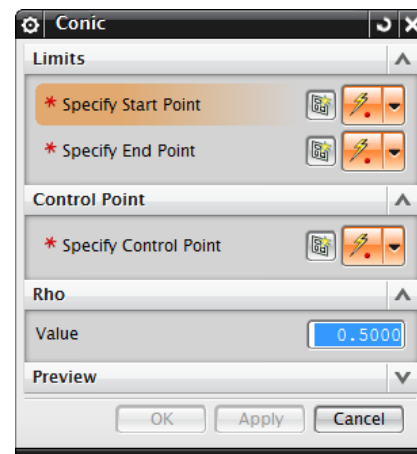


Figure 2-31 The **Conic** dialog box



Tip

Sometimes while placing points or drawing an ellipse, some red cross marks are displayed on the screen. To remove them, refresh the screen by pressing the F5 key.

If $0 < \text{Rho} < 0.5$, then conics of elliptical shape will be created.

If $\text{Rho} = 0.5$, then conics of parabolic shape will be created.

If $0.5 < \text{Rho} < 1$, then conics of hyperbolic shape will be created.

Figure 2-32 shows conics with different Rho values.



Figure 2-32 Conics with different Rho values

Drawing Studio Splines

Ribbon: Home > Direct Sketch > Sketch Curve Gallery > Studio Spline
Menu: Insert > Sketch Curve > Studio Spline



The **Studio Spline** tool allows you to create studio splines for creating free form features. When you invoke this tool, the **Studio Spline** dialog box will be displayed, as shown in Figure 2-33. The various rollouts in this dialog box are discussed next.



Note
There are some tools that are not visible by default in the **Sketch Curve** gallery of the **Direct Sketch** group. You can click on the down or up arrow available on the right corner of **Direct Sketch** group to display the tools that are not visible by default.

Type Rollout

This rollout contains different options to create studio splines. These options are discussed next.

Type Drop-down List

There are two methods for drawing studio splines. The options to invoke these methods are available in the **Type** drop-down list. The methods of drawing a studio spline are discussed next.

Through Points

This is the default method of drawing splines. In this method, you can specify continuous points in the drawing area by clicking the left mouse button. These points will act as the defining points of the spline. While drawing a spline, you can move these points to change the shape of the spline, and then continue drawing the spline. Figure 2-34 shows a spline being drawn by using this method.

By Poles

If you use this method, the points that you specify in the drawing window act as the poles of the spline. Figure 2-35 shows a spline being drawn by using this method. Remember that the display of poles is automatically removed when you finish drawing the spline.

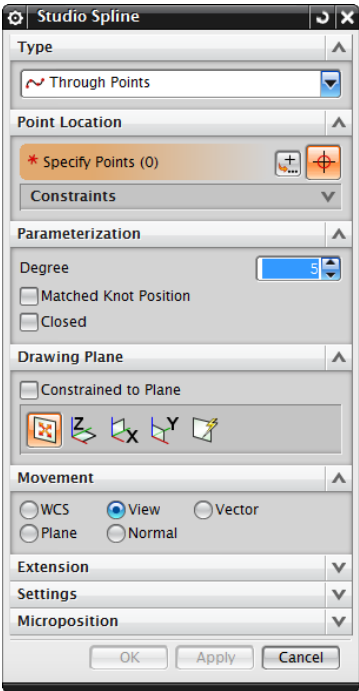


Figure 2-33 The Studio Spline dialog box

Point Location / Pole Location Rollout

The options in this rollout are used to specify the spline point or pole location. You can use the **Point Constructor** button to create or locate a point.

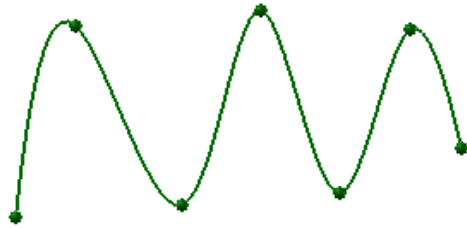


Figure 2-34 Drawing a spline by using the Through Points method

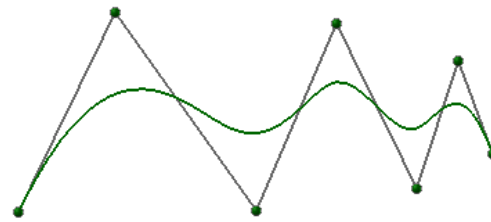


Figure 2-35 Drawing a spline by using the By Poles method

Parameterization Rollout

The options in this rollout are used to specify the parameters of the spline.

Degree Spinner

The **Degree** spinner is used to specify the degree of a spline. Figures 2-36 and 2-37 show splines of various degrees. Note that the degree of a spline cannot be more than the number of poles used to draw it.

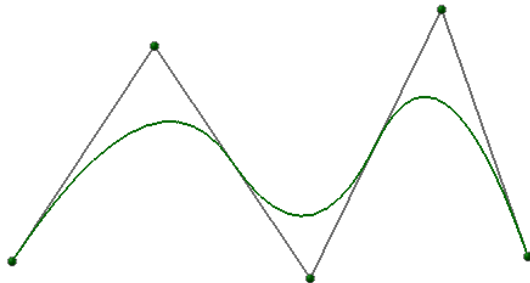


Figure 2-36 Spline of degree 2

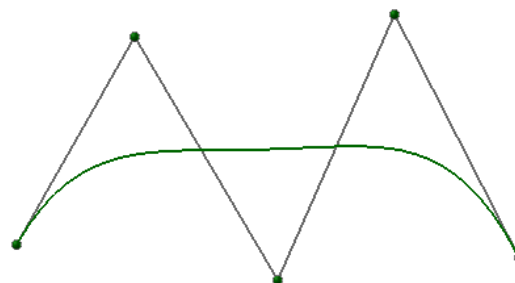


Figure 2-37 Spline of degree 4

Single Segment

This check box is available only when you select the **By Poles** option and is used to create a single segment spline. However, you can specify as many numbers of poles as you require. If you select this check box, the **Closed** check box will not be activated.

Matched Knot Position

This check box is available only when you select the **Through Points** option and is used to create a spline by matching the position of the defining points with the knots. In this case, the knots are placed only at the places where the defining points are specified. If you select this check box, the **Closed** check box will not be activated.

Closed

This check box is available for both the methods and is used to create closed splines. Figure 2-38 shows a closed spline.

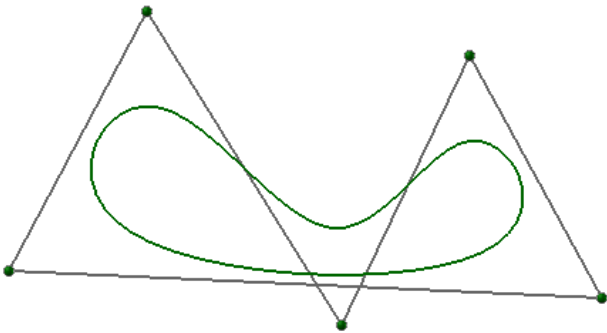


Figure 2-38 A closed spline

Filleting Sketched Entities

Ribbon:

Home > Direct Sketch > Sketch Curve Gallery > Fillet

Menu:

Insert > Sketch Curve > Fillet



Filleting is defined as the process of rounding the sharp corners of a profile to reduce the stress concentration. Fillets are created by removing the sharp corners and replacing them with round corners. In NX, you can create a fillet between any two sketched entities. You can also create a fillet using three sketched entities.

To create fillets, invoke the **Fillet** tool; the **Fillet** dialog box will be displayed, as shown in Figure 2-39. Also, you will be prompted to select or drag the cursor over curves to create a fillet.

The **Radius** dynamic input box will be displayed below the cursor. You do not need to necessarily specify the fillet radius in advance. Instead, you can select the two entities to fillet and then move the cursor to define the radius of the fillet. Figure 2-40 shows the preview of a fillet being created between two lines. In this case, the radius value is not defined in advance. As a result, as you move the cursor, the fillet radius is modified dynamically. The **Fillet** dialog box is divided into two areas, **Fillet Method** and **Options**.




Figure 2-39 The *Fillet* dialog box




Figure 2-40 Preview of a fillet being created between two lines

Fillet Method Area

The first button in this area is the **Trim** button and is chosen by default. As a result, the sharp corner will automatically be trimmed after filleting, as shown in Figure 2-41. If you choose the **Untrim** button, the sharp corner will not be trimmed after filleting, as shown in Figure 2-42.

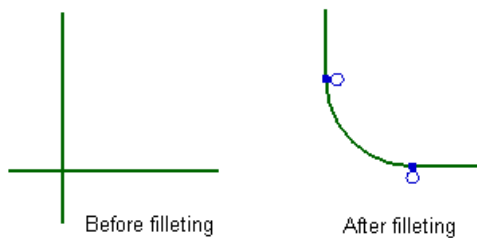


Figure 2-41 Sharp corner before and after filleting using the **Trim** button

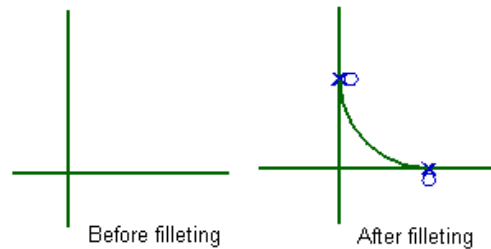


Figure 2-42 Sharp corner before and after filleting using the **Untrim** button



Tip

Ideally, the profiles created with the fillet may not give the desired result when used to create features. Therefore, they should be avoided in the sketch.

Options Area

The **Delete Third Curve** button in this area is useful if you are creating a fillet by using three entities. While using this option, the middle entity should be selected last. This button ensures that if the fillet is tangent to the middle entity then the middle entity is automatically deleted, as shown in Figure 2-43. If this button is deactivated, the middle entity will not be deleted, as shown in Figure 2-44. The **Create Alternate Fillet** button in this area will show all the alternative solutions for the fillet. It is recommended that this button should be turned off.

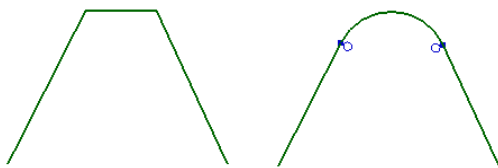


Figure 2-43 The entity before and after filleting with the third curve deleted

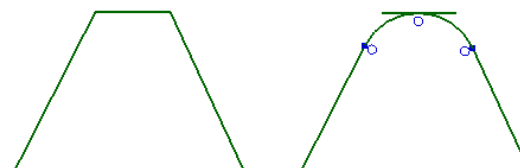


Figure 2-44 The entity before and after filleting with the third curve retained



Tip

1. In NX, you can create fillets by simply dragging the cursor across the entities that you need to fillet. For example, if you need to fillet two lines, invoke the **Fillet** tool and drag the cursor across them; the corner of these two lines will be filleted. The radius of the fillet will depend on how far you dragged the mouse from the corner.

2. When you fillet two entities, if there is more than one solution for fillet, then the best solution will be displayed by default. If you want to view the alternate solution, press the **PAGE UP** key.

THE DRAWING DISPLAY TOOLS

The drawing display tools are an integral part of any solid modeling tool. These tools enable you to zoom, pan, and rotate the drawing so that you can view it clearly. The drawing display tools in NX are located in the **View** tab in the **Ribbon** and the methods of using these tools are discussed next.



Note

As most of the drawing display tools are transparent tools, you can use them at any time without exiting the other tool you are working with.

Fitting Entities in the Current Display

Ribbon: View > Orientation > Fit
Menu: View > Operation > Fit



The **Fit** tool enables you to modify the drawing display area such that all entities in the drawing fit in the current display. You can also use the CTRL+F keys to fit the entities in the current display.

Zooming an Area

Ribbon: View > Orientation > Zoom
Menu: View > Operation > Zoom



The **Zoom** tool allows you to zoom into a particular area by defining a box around it. When you choose this tool, the default cursor is replaced by a magnifying glass cursor and you will be prompted to drag the cursor to indicate the zoom rectangle. Specify a point on the screen to define the first corner of the zoom area. Next, hold the left mouse button and drag the cursor. Now, release the left mouse button to specify another point to define the opposite corner of the zoom area. The area defined inside the rectangle will be zoomed and displayed on the screen.

You can also zoom in or out a drawing by specifying a scale value. To do so, choose **Menu > View > Operation > Zoom** from the **Top Border Bar**; the **Zoom View** dialog box will be displayed, as shown in Figure 2-45. Specify a scale value in the **Scale** edit box. In addition, you can also use the **Half Scale**, **Double Scale**, **Reduce 10%**, and **Increase 10%** buttons to zoom in or out of the drawing.

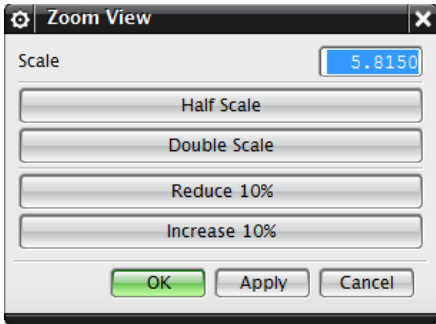


Figure 2-45 The Zoom View dialog box

Dynamic Zooming

Ribbon: View > Orientation > Zoom In/Out (*Customize to Add*)



The **Zoom In/Out** tool enables you to dynamically zoom in or out of the drawing. When you invoke this tool, the default cursor is changed into a magnifying glass cursor with a '+' and a '-' sign at the center of the cursor. To zoom in, press and hold the left mouse button in the drawing window and then drag the cursor upward. Similarly, to zoom out, press and hold the left mouse button and drag the cursor down.

Panning Drawings

Ribbon: View > Orientation > Pan

Menu: View > Operation > Pan



The **Pan** tool allows you to dynamically pan drawings in the drawing window. When you invoke this tool, the cursor is replaced by a hand cursor and you are prompted to drag the cursor to pan the view. Press and hold the left mouse button in the drawing window and then drag the mouse to pan the drawing.



Tip

*In NX, you can also display the Selection MiniBar and the View shortcut menu by right-clicking in the drawing area. The Selection MiniBar is a compact version of the **Selection Group**.*

Fitting View to Selection

Ribbon: View > Orientation > Fit View to Selection (*Customize to Add*)

Menu: View > Operation > Fit View to Selection



The **Fit View to Selection** tool zooms the display such that the selected entity fits in the current display area. This tool is available only when an entity is selected in the drawing window.

Restoring the Original Orientation of the Sketching Plane

Ribbon: Home > Direct Sketch > More > Sketch Tools > Orient to Sketch (*Customize to Add*)

Menu: View > Orient View to Sketch



Sometimes while using the drawing display tools, you may change the orientation of the sketching plane. The **Orient View to Sketch** tool restores the original orientation that was active when you invoked the Sketch in Task environment. This tool is available only in the Sketch in Task environment.

SETTING SELECTION FILTERS IN THE SKETCH IN TASK ENVIRONMENT

NX provides you with various object selection filters in the Sketch in Task environment. These filters allow you to define the types of entities you want to select. All these filters are available in the **Selection Group** on the upper left corner in the **Top Border Bar** of the drawing window. Some of these filters are discussed next.

Type Filter

The **Type Filter** drop-down list is used to specify the type of entity to be selected as filter type. By default, the **No Selection Filter** option is selected, refer to Figure 2-46. This option allows you to select any entity from the drawing window. These entities include sketch, datums, curve, point, sketch, Face, sketch constraints, and so on. Select the required entity from the **Type Filter** drop-down list. Now, you can select only the specified entity from the drawing window.




Figure 2-46 The **Type Filter** drop-down list

Selection Scope

This drop-down list allows you to filter the selection from the entire assembly, or from the workpart only, or from the active sketch only. Select the required option from the **Selection Scope** drop-down list.

General Selection Filters



This flyout provides the detailed filter options. The options in the **General Selection Filters** flyout, as shown in Figure 2-47, are discussed next.

Detailed Filtering

This option is used to filter the selection using layers, type of entity, display attributes, and detailed types of entity. Select the **Detailed Filtering** option in the **General Selection Filter** flyout; the **Detailed Filtering** dialog box will be displayed. In this dialog box, you can specify layers, types of entity, details of the types of entity, and display attributes that you need to filter.




Figure 2-47 The **General Selection Filters** flyout

Color Filter

This option allows you to filter the selection using a specific color. Only the entities in the specified color will be selected.

Layer Filter

This drop-down list allows you to filter the selection using a specific layer. You need to select the layer from the **Layer Filter** drop-down list and the entities in this layer can only be selected. By default, the **All** option is selected, which allows to select the entities from all the layers.

Reset Filters



This tool is used to reset all the filtering options defined in the **General Selection Filters** flyout and the **Type Filter** drop-down list to their default states.

Allow Selection of Hidden Wireframe



This tool allows you to select the hidden wireframe geometries such as curves and edges.

Deselect All



When you choose this tool, all the currently selected entities are deselected.

Find in Navigator



This tool is used to highlight the selected entities in the **Part** or **Assembly Navigator** and will be activated only when you select an entity. Select the entities that you want to highlight in the **Part** or **Assembly Navigator** and choose the **Find in Navigator** tool in the **Selection Bar**. Next, choose the **Part Navigator** tab from the **Resource Bar** to view the highlighted entities.

SELECTING OBJECTS

After setting the selection filters, you can select objects in the drawing window of NX. When no tool is active, the select mode will be invoked. In this mode, you can select individual sketched entities from the drawing window by clicking on them. To select multiple entities, you can use the following two methods:

Rectangle



If you choose this tool from the **Selection Group** in the **Top Border Bar** and drag the cursor in the drawing window, a temporary rectangle will be created. Also, all the objects lying completely within the temporary rectangle will get selected.

Lasso



If you choose this tool from the **Selection Group** in the **Top Border Bar** and drag the cursor in the drawing window, a temporary free form curve will be created. Also, all the objects lying completely within the free form curve will get selected.

DESELECTING OBJECTS

By default, the selected objects are displayed in orange color. If you want to deselect the individual objects from the selection, press and hold the SHIFT key and click on it; the entity will be deselected. If you want to deselect all the selected entities, press the ESC key. Alternatively, press and hold the SHIFT key and drag a box around the entities; all the entities that lie completely inside the box will get deselected. Also, you can choose the **Deselect All** tool from the **Selection Group** in the **Top Border Bar** to deselect all the selected entities.

USING SNAP POINTS OPTIONS WHILE SKETCHING

While drawing a sketch, you will notice that the cursor automatically snaps to some keypoints of the sketched entities. For example, if you are specifying the center point of a circle and you move the cursor close to the endpoint of an existing line, the cursor snaps to the endpoint of the line and changes into a snap cursor. Also, the endpoint snap symbol is displayed below the cursor. This suggests that the endpoint of the line has been snapped and if you click now, the center point of the circle will coincide with the endpoint of the line.

NX allows you to control these snap settings using the snap points options in the **Selection Group** in the **Top Border Bar**, as shown in Figure 2-48. In this bar, some of the tools are chosen by default. You can choose more tools to turn on the respective snapping option.

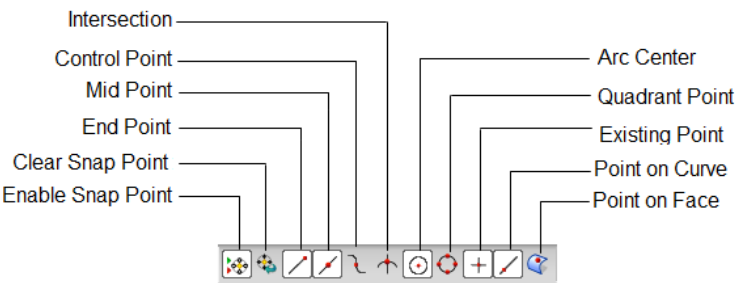



Figure 2-48 Buttons used for snap settings

DELETING SKETCHED ENTITIES

Menu: Edit > Delete

 You can delete the sketched entities by selecting them and pressing the DELETE key. You can also delete a sketched entity by choosing **Menu > Edit > Delete** tool from the **Top Border Bar**. However, if you choose this tool without selecting any sketched entity, the **Class Selection** dialog box will be displayed, as shown in Figure 2-49. You can now select the entities to be deleted and then choose the **OK** button in this dialog box. To close the dialog box, choose the **OK** or **Cancel** button.

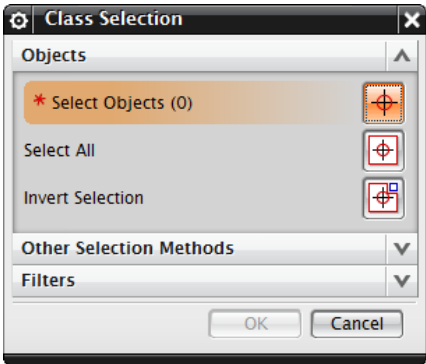



Figure 2-49 The Class Selection dialog box

EXITING THE SKETCH ENVIRONMENT

Ribbon: Home > Direct Sketch > Finish Sketch

 After drawing the sketch, you need to exit the Sketch environment to convert the sketch into a feature. To exit sketching, choose the **Finish Sketch** tool from the **Direct Sketch** group of the **Home** tab in the **Ribbon**. Alternatively, right-click in the drawing area and choose the **Finish Sketch** option from the shortcut menu. When you exit the Sketch environment, you can convert the sketch into a solid model by using the solid modeling tools. Note that you can also invoke solid modeling tools without exiting from the Sketch environment.

TUTORIALS

As mentioned in the introduction, NX is parametric in nature. Therefore, you can draw a sketch of any dimensions and then modify its size by changing the values of dimensions. However, in this chapter, you will use the dynamic input boxes to draw the sketch of exact dimensions. This will help you improve your sketching skills.

Tutorial 1

In this tutorial, you will draw a profile for the base feature of the model shown in Figure 2-50. The profile to be drawn is shown in Figure 2-51. **(Expected time: 30 min)**

The following steps are required to complete this tutorial:

- Start a new file.
- Select the XC-YC plane as the sketching plane.
- Draw the sketch of the model by using the **Profile** and **Rectangle** tools.
- Finish the sketch and save the file.

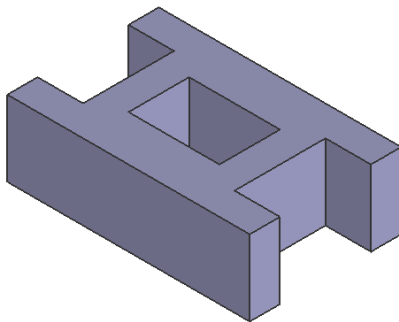


Figure 2-50 Model for Tutorial 1

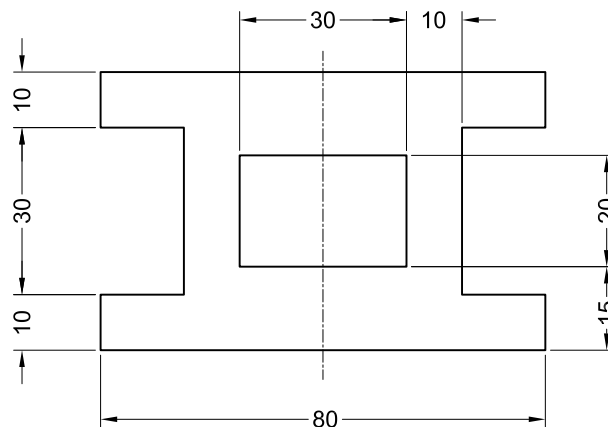


Figure 2-51 Sketch for Tutorial 1

Starting NX and Opening a New File

First, you need to start NX and then open a new file.

- Double-click on NX shortcut icon on the desktop of your computer to start NX.
- To start a new file, choose the **New** button from the **Standard** group of the **Home** tab or choose **Menu > File > New** from the **Top Border Bar**; the **New** dialog box is displayed.



3. Select the **Model** template from the **Templates** rollout.
4. Enter **c02tut1** as the name of the document in the **Name** text box of the dialog box.
5. Choose the button on the right of the **Folder** text box; the **Choose Directory** dialog box is displayed.



It is recommended that you create a folder with the name NX in the hard drive of your computer and then create separate folders for each chapter inside it for saving the tutorial files of this textbook.

6. In this dialog box, browse to *NX /c02* folder and then choose the **OK** button twice; a new file is started in the Modeling environment.

Drawing the Sketch in the Modeling Environment

The base sketch of this model will be created on the XC-YC plane.

1. Choose the **Sketch** tool from the **Direct Sketch** group of the **Home** tab; the **Create Sketch** dialog box is displayed.
2. Select the XC-YC plane from the Datum Coordinate system.
3. Choose the **OK** button from the **Create Sketch** dialog box; the additional sketching tools become available and the sketching plane is oriented parallel to the screen.



Drawing the Outer Profile of the Sketch

The outer profile of the sketch consists of lines and it can be drawn by using the **Profile** tool.

1. Choose the **Profile** tool from the **Direct Sketch** group of the **Home** tab in the **Ribbon**; the **Profile** dialog box is displayed. By default, the **Line** button is active in this dialog box and the dynamic input boxes are displayed below the line cursor.
2. Move the cursor close to the origin; the coordinates of the point are displayed as 0,0 in the dynamic input boxes. Click to specify the start point of the line at this point.



As you move the cursor on the screen, the line stretches and its length and angle values are modified dynamically in the dynamic input boxes.

3. Enter **80** in the **Length** dynamic input box and press the TAB key. Next, enter **0** in the **Angle** dynamic input box and press the ENTER key.
4. Choose the **Fit** tool from the **View** tab to fit the sketch into the drawing window.

5. Move the cursor away from the end point of the last line and then enter **10** as the length and **90** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
6. Enter **15** as the length and **180** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
7. Enter **30** as the length and **90** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
8. Enter **15** as the length and **0** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
9. Enter **10** as the length and **90** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
10. Enter **80** as the length and **180** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
11. Enter **10** as the length and **-90** or **270** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
12. Enter **15** as the length and **0** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
13. Enter **30** as the length and **-90** or **270** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
14. Enter **15** as the length and **180** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
15. Enter **10** as the length and **-90** or **270** as the angle in the **Length** and **Angle** dynamic input boxes, respectively. Next, press the ENTER key.
16. Press the ESC key twice to exit the **Profile** tool. The outer profile of the sketch is shown in Figure 2-52.

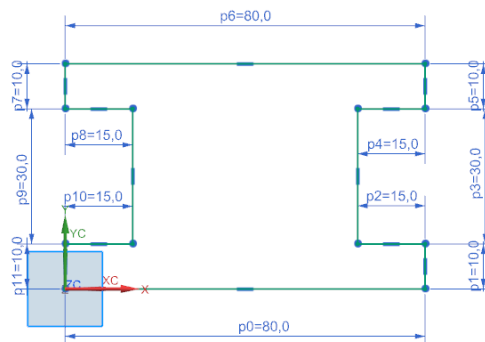


Figure 2-52 Outer profile of the sketch

Drawing the Rectangle

Next, you need to draw the inner profile, which is a rectangle. You can use the **By 2 Points** option of the **Rectangle** tool to draw the rectangle.

1. Choose the **Rectangle** tool from the **Direct Sketch** group; the **Rectangle** dialog box is displayed and the **By 2 Points** button is chosen by default in this dialog box.
2. Enter **25** and **15** as the coordinates of the first point of the rectangle in the **XC** and **YC** dynamic input boxes, respectively. Next, press the ENTER key.
3. Enter **30** and **20** as the width and height of the rectangle in the **Width** and **Height** dynamic input boxes, respectively. Next, press the ENTER key. A preview of the rectangle is displayed, but it is not actually drawn yet. As you move the cursor in the drawing window, the rectangle also moves.
4. Move the cursor close to the top right corner of the drawing window and then click to draw the rectangle.
5. Press the ESC key to exit the tool. The final sketch for Tutorial 1 is shown in Figure 2-53.

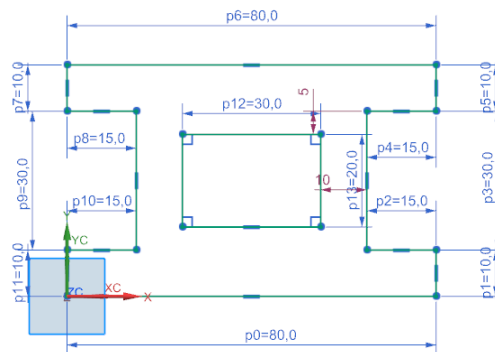


Figure 2-53 Final sketch for Tutorial 1

Finishing the Sketch and Saving the File

NX allows you to save the sketch file in the Sketch in Task environment.

1. Choose the **Save** button from the **Quick Access** toolbar to save the sketch.
2. Choose **Menu > File > Close > Selected Parts** from the **Top Border Bar**; the **Close Part** dialog box is displayed.
3. Select the name of the current file from the list area in the **Part** rollout and then choose the **OK** button to close the current file.



Tutorial 2

In this tutorial, you will draw a sketch for the model shown in Figure 2-54. The sketch to be drawn is shown in Figure 2-55. **(Expected time: 30 min)**




Figure 2-54 Model for Tutorial 2

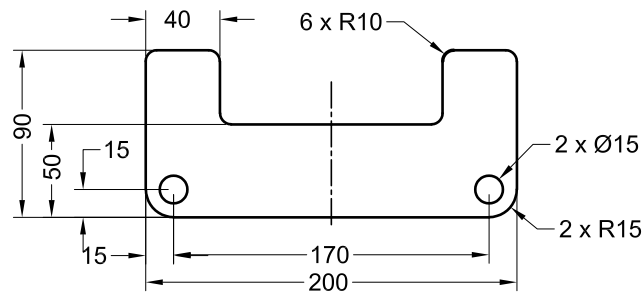




Figure 2-55 Sketch for Tutorial 2

The following steps are required to complete this tutorial:

- Start a new file.
- Draw the sketch by using the XC-ZC plane as the sketching plane.
- Draw the outer loop of the profile by using the **Profile** tool.
- Fillet the sharp corners of the outer loop by using the **Fillet** tool.
- Draw circles by using the centers of fillets to complete the profile.
- Finish the sketch and save the file.

Starting NX and Opening a New File

First, you need to start NX and then start a new file.

- Double-click on NX shortcut icon on the desktop of your computer to start NX.
- To start a new file, choose the **New** button from the **Standard** group of the **Home** tab or choose **Menu > File > New** from the **Top Border Bar**; the **New** dialog box is displayed. 
- Select the **Model** template from the **Templates** rollout.
- Enter **c02tut2** as the name of the document in the **Name** text box of the dialog box.
- Choose the button on the right side of the **Folder** text box; the **Choose Directory** dialog box is displayed. 
- In this dialog box, browse to **NX/c02** folder and then choose the **OK** button twice; the new file is started in the Modeling environment.

Drawing the Sketch in the Modeling Environment

The base sketch of this model will be created on the XC-ZC plane. Therefore, you need to draw the sketch using this plane.

1. Choose the **Sketch** tool from the **Direct Sketch** group of the **Home** tab; the **Create Sketch** dialog box is displayed.
2. Select the XC-ZC plane from the drawing window.
3. Choose the **OK** button from the **Create Sketch** dialog box; the sketching plane is oriented parallel to the screen.



Drawing Lines of the Outer Loop

You will draw the lines of the outer loop by using the line mode of the **Profile** tool. The line will start from the origin, which is the point where the XC-YC, YC-ZC, and ZC-XC planes intersect. The coordinates of the origin are 0,0,0. In the current view, the origin is the intersection point of the two planes displayed as the horizontal and vertical lines.

1. Choose the **Profile** tool from the **Direct Sketch** group of the **Home** tab in the **Ribbon** and the **Profile** dialog box is displayed. The **Line** button is chosen by default in the dialog box and the dynamic input boxes are displayed below the line cursor.
2. Move the cursor close to the origin; the coordinates of the point are displayed as 0,0 in the dynamic input boxes. Next, click to specify the start point of the line.



The point you specified is selected as the start point of the line and the endpoint is attached to the cursor. As you move the cursor on the screen, the line stretches and its length and angle values are modified dynamically in the dynamic input boxes. Next, you need to specify the endpoint of this line as well as the points to define the remaining lines. This can be done by using the **Length** and **Angle** dynamic input boxes.

3. Enter **200** in the **Length** dynamic input box and press the TAB key. Next, enter **0** in the **Angle** dynamic input box and press the ENTER key.
4. Choose the **Fit** tool from the **View** tab to fit the sketch into the drawing window. Since the **Line** tool is still active, therefore you are prompted to specify the second point of the line.
5. Enter **90** in the **Length** dynamic input box and press the TAB key. Next, enter **90** in the **Angle** dynamic input box and press the ENTER key; a vertical line of 90 mm is drawn.
6. Choose the **Fit** tool again to fit the drawing into the current display.
7. Move the cursor away from the end point of the last line and then enter **40** in the **Length** dynamic input box and press the TAB key. Next, enter **-180** in the **Angle** dynamic input box and press the ENTER key; a horizontal line of 40 mm is drawn.

8. Move the cursor away from the end point of the last line and then enter **40** in the **Length** dynamic input box and press the TAB key. Next, enter **-90** in the **Angle** dynamic input box and press the ENTER key; a vertical line of 40 mm is drawn downward.
9. Move the cursor away from the end point of the last line and then enter **120** in the **Length** dynamic input box and press the TAB key. Next, enter **180** in the **Angle** dynamic input box and press the ENTER key; a horizontal line of 120 mm is drawn.
10. Move the cursor vertically upward until the horizontal help line is displayed from the top endpoint of the vertical line of 40 mm. Note that at this point, the value of the length in the **Length** dynamic input box is 40 and the value of the angle is 90. Click to specify the endpoint of this line.
11. Move the cursor horizontally toward the left and make sure that the horizontal constraint symbol is displayed. Click to specify the endpoint of the line when the vertical help line is displayed from the vertical plane. If the help line is not displayed, move the cursor once on the vertical plane and then move it back.
12. Move the cursor vertically downward to the origin. If the first line is not highlighted in yellow, move the cursor over it once and then move it back to the origin; the cursor snaps to the endpoint of the first line.
13. Click to specify the endpoint of the line when the vertical constraint symbol is displayed. Choose the **Fit** tool to fit the sketch into the drawing window.
14. Press the ESC key twice to exit the **Profile** tool. The sketch after drawing the lines is shown in Figure 2-56.

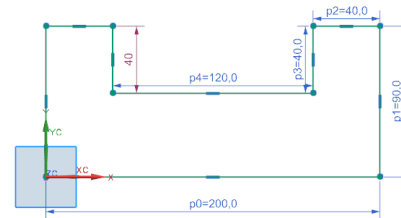


Figure 2-56 Sketch after drawing the lines

Filleting Sharp Corners

In this section, you need to fillet sharp corners by using the **Fillet** tool so that no sharp edges are in the final model.

1. Choose the **Fillet** tool from the **Direct Sketch** group; the **Fillet** dialog box is displayed.



In this tutorial, the lower left and lower right corners are filleted with a radius of 15 mm and the remaining corners are filleted with a radius of 10 mm.

2. Enter **15** in the **Radius** dynamic input box and press the ENTER key.
3. Move the cursor over the lower left corner of the sketch; the two lines comprising this corner are highlighted in yellow. Click to select this corner; a fillet is created at the lower left corner.

- Similarly, move the cursor over the lower right corner and click on it when the two lines that form this corner are highlighted in yellow.

Next, you need to modify the fillet radius value and fillet the remaining corners.

- Enter **10** in the **Radius** dynamic input box and press the ENTER key.
- Select the remaining corners of the sketch one by one and fillet them with a radius of 10.
- Right-click and then choose the **OK** option from the shortcut menu to exit the **Fillet** tool. The fillets are created, refer to Figure 2-57.

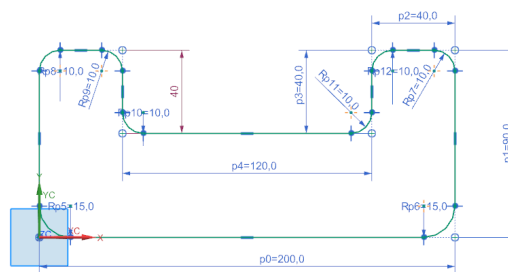


Figure 2-57 Sketch after creating fillets

Drawing Circles

Finally, you need to draw circles to complete the sketch. The circles will be drawn by using the **Circle** tool. Use the center points of the fillets as the center points of the circles.

- Choose the **Circle** tool from the **Direct Sketch** group; the **Circle** dialog box is displayed. By default, the **Circle by Center and Diameter** button is chosen in this dialog box. Also, you are prompted to select the center of the circle.
- Move the cursor toward the center point of the lower left fillet; the cursor snaps to the center point of the arc. Also, the center point snap symbol is displayed above the dynamic input boxes.
- Click when the cursor snaps to the center point of the fillet to specify the center point of the circle.
- Enter **15** in the **Diameter** dynamic input box and press the ENTER key; a circle of the specified diameter is drawn at the specified center point. Also, another circle of **15** diameter is attached to the cursor.
- Move the cursor toward the center point of the lower right fillet; the cursor snaps to the center point of the arc and the center point snap symbol is displayed above the dynamic input box.



- Evaluation Copy. Do not reproduce. For information visit www.cadcim.com**



Evaluation Copy. Do not reproduce. For information visit www.cadcim.com

Evaluation Copy. Do not reproduce. For information visit www.cadcim.com

- Evaluation Copy. Do not reproduce. For information visit www.cadcim.com**

Evaluation Copy. Do not reproduce. For information visit www.cadcim.com



Evaluation Copy. Do not reproduce. For information visit www.cadcam.com

Evaluation Copy. Do not reproduce. For information visit www.cadcam.com

Evaluation Copy. Do not reproduce. For information visit www.cadcam.com

- Evaluation Copy. Do not reproduce. For information visit www.cadcam.com**



Evaluation Copy. Do not reproduce. For information visit www.cadcam.com

Evaluation Copy. Do not reproduce. For information visit www.cadcam.com

Tutorial 3

In this tutorial, you will draw the profile of the model shown in Figure 2-59. The profile to be drawn is shown in Figure 2-60. (Expected time: 30 min)

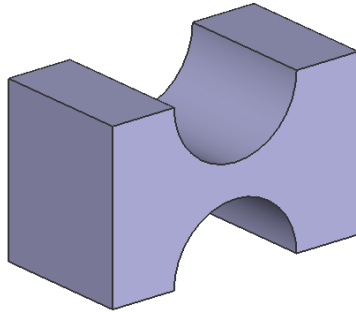


Figure 2-59 Model for Tutorial 3

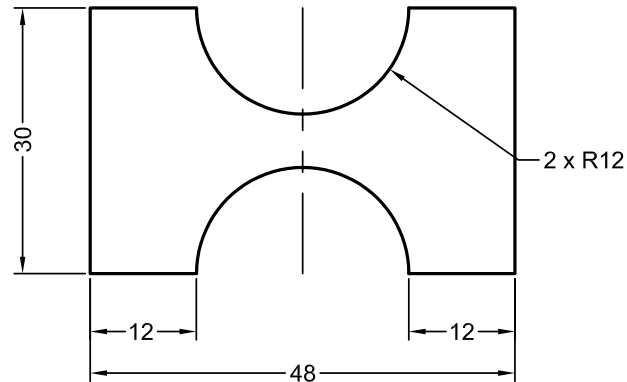



Figure 2-60 Sketch for Tutorial 3

The following steps are required to complete this tutorial:

- Start a new file.
- Select the YC-XC plane as the sketching plane.
- Draw the sketch of the model by using the **Profile** tool.
- Finish the sketch and save the file.

Starting a New File

If you continue working after completing Tutorial 2, you do not need to open a new session of NX. You can start a new part file by selecting the **Model** template from the **New** dialog box.

- To start a new file, choose the **New** button from the **Standard** group of the **Home** tab or choose **Menu > File > New** from the **Top Border Bar**; the **New** dialog box is displayed.
- Select the **Model** template from the **Templates** rollout.
- Choose the button on the right of the **Name** text box; the **Choose New File Name** dialog box is displayed. 
- In this dialog box, browse to *NX/c02* and then enter **c02tut3** in the **File name** edit box. Next, choose the **OK** button twice; the new file is started in the Modeling environment.

Drawing the Sketch in the Modeling Environment

The base sketch of this model will be created on the YC-ZC plane. Therefore, you need to draw the sketch using this plane.

1. Choose the **Sketch** tool from the **Direct Sketch** group; the **Create Sketch** dialog box is displayed.
2. Select the YC-ZC plane from the drawing window. Note that the Z-axis direction of the sketching plane points toward the front side of the sketching plane and the direction of Y-axis is upward.
3. Choose the **OK** button from the **Create Sketch** dialog box to start the sketch.
4. Choose **Menu > View > Orient View to Sketch** option from the **Top Border Bar**; the sketching plane is oriented parallel to the screen.

Drawing the Sketch

The sketch that you need to draw consists of multiple lines and two arcs. All these entities can be drawn by using the **Line** and **Arc** options of the **Profile** tool.

1. Choose the **Profile** tool from the **Direct Sketch** group; the **Profile** dialog box is displayed. In this dialog box, the **Line** button is activated by default. Also, the dynamic input boxes are displayed below the line cursor.
2. Move the cursor close to the origin; the coordinates of the point are displayed as 0,0 in the dynamic input boxes. Click to specify the start point of the line at this point.

The point you specified is selected as the start point of the line and the endpoint is attached to the cursor. As you move the cursor on the screen, the line stretches and its length and angle values are modified dynamically in the dynamic input boxes.

Next, you need to specify the endpoint of this line. Also, you need to specify the points to define the remaining lines of the sketch. This can be done by using the **Length** and **Angle** dynamic input boxes.

3. Enter **12** in the **Length** dynamic input box and press the TAB key. Next, enter **0** in the **Angle** dynamic input box and press the ENTER key. The first line is drawn and a rubber-band line is displayed with the start point at the endpoint of the previous line and the endpoint attached to the cursor.

Now, you need to invoke the arc mode because the next entity to be drawn is an arc.

4. Choose the **Arc** button from the **Object Type** area of the **Profile** dialog box to invoke the arc mode.

A rubber-band arc is displayed with the start point fixed at the endpoint of the last line and the endpoint attached to the cursor. Also, the quadrant symbol is displayed at the start point of the arc.

5. Move the cursor to the start point of the arc and then move it vertically upward through a small distance. Next, move the cursor toward the right; you will notice that a normal arc starts from the endpoint of the last line.

6. Enter **12** in the **Radius** dynamic input box and press the TAB key. Next, enter **180** in the **Sweep Angle** dynamic input box and press the ENTER key.

A preview of the resulting arc is displayed, but the arc is still not drawn. To draw the arc, you need to specify a point on the screen with the values mentioned in the dynamic input boxes.

7. Move the cursor horizontally toward the right and click when the preview of the required arc is displayed. The arc is drawn and the line mode is invoked again.
8. Enter **12** as the length and **0** as the angle in the **Length** and **Angle** dynamic input boxes, respectively, and then press the ENTER key. Choose the **Fit** tool from the **View** tab to fit the sketch into the drawing window.
9. Enter **30** as the length and **90** as the angle in the **Length** and **Angle** dynamic input boxes, respectively, and then press the ENTER key.
10. Move the cursor horizontally toward the left. Make sure that the horizontal constraint symbol is displayed. Click to specify the endpoint of the line when the vertical help line is displayed from the endpoint of the arc.

Next, you need to draw the arc by invoking the arc mode.

11. Choose the **Arc** button from the **Profile** dialog box to invoke the arc mode; a rubber-band arc is displayed with its start point fixed at the endpoint of the last line.
12. Move the cursor to the start point of the arc and then move it vertically downward through a small distance. When the normal arc appears, move the cursor toward the left.
13. Move the cursor over the lower arc once and then move it toward the left, refer to the Figure 2-61.

A horizontal help line is displayed originating from the center of the arc being drawn. At the point where the cursor is vertically in line with the start point of the lower arc, a vertical help line appears from the start point of the lower arc, refer to the Figure 2-61.

14. Click to define the endpoint of the arc when the horizontal and vertical help lines are displayed. The arc is drawn and the line mode is invoked again.
15. Enter **12** as the length and **180** as the angle in the **Length** and **Angle** dynamic input boxes, respectively, and then press the ENTER key.
16. Move the cursor to the first line and then move it to the start point of this line; the cursor snaps to the start point of the line.
17. Click to define the endpoint of this line when the cursor snaps to the start point of the first line.

18. Press the ESC key twice to exit the **Profile** tool. The final sketch of the model is shown in Figure 2-62.

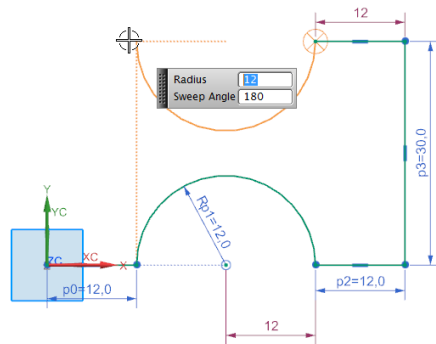


Figure 2-61 Horizontal and vertical help lines displayed to define the endpoint of the arc

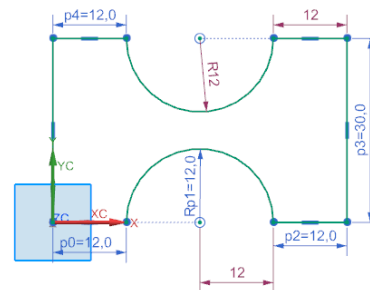


Figure 2-62 Final sketch for Tutorial 3

Finishing the Sketch and Saving the File

NX allows you to save the sketch file in the Sketch environment.

1. Choose the **Save** button from the **Quick access** toolbar or from the **File** tab to save the sketch.
2. Choose **Menu > File > Close > Selected Parts** from the **Top Border Bar**; the **Close Part** dialog box is displayed.
3. Select the name of the current file from the list area in the **Part** rollout and then choose the **OK** button to close the current file.



Self-Evaluation Test

Answer the following questions and then compare them to those given at the end of this chapter:

1. You can restore the original orientation of the sketching plane by using the _____ tool in the **Sketch** group.
2. You can invoke the arc mode within the **Profile** tool by choosing the _____ button from the **Profile** dialog box.
3. You can fillet corners in a sketch by using the _____ tool.
4. You can draw an elliptical arc by using the _____ tool.
5. If you choose the _____ button from the **Rectangle** dialog box, it will enable you to draw a centerpoint rectangle.

6. You can exit the Sketch environment by choosing the _____ tool from the **Direct Sketch** group.
7. Most of the designs created in NX consist of sketch-based features and placed features. (T/F)
8. When you invoke the Sketch environment from the **Direct Sketch** group, the **Profile** tool is invoked by default. (T/F)
9. You can use the dynamic input boxes to specify the exact values of the sketched entities. (T/F)
10. You need to choose the **Sketch in Task Environment** tool to invoke the Sketch environment. (T/F)

Review Questions

Answer the following questions:

1. Which of the following dialog boxes is displayed when you choose the **New** button from the **File** tab to start a new file?
 - (a) **New Part File**
 - (b) **New Item**
 - (c) **New**
 - (d) **Part File**
2. Which of the following tools in NX is used to create conics?
 - (a) **General Conic**
 - (b) **Conic**
 - (c) **Round**
 - (d) None
3. Which mode is automatically invoked from the **Profile** dialog box when you specify the start point of a line?
 - (a) **Coordinate Mode**
 - (b) **Angle Mode**
 - (c) **Parameter Mode**
 - (d) None
4. In NX, how many methods are used to start a new file?
 - (a) 1
 - (b) 2
 - (c) 3
 - (d) 5
5. Which of the following options is available in the **Studio Spline** dialog box along with the **By Poles** option to draw splines?
 - (a) **No Poles**
 - (b) **From Poles**
 - (c) **From Points**
 - (d) **Through Points**
6. The files in NX are saved with *.prt* extension. (T/F)

7. You can select entities by dragging a box around them. (T/F)
8. You can set the selection mode to select only the sketched entities. (T/F)
9. In NX, you can create fillets by simply dragging the cursor across the entities that you want to fillet. (T/F)
10. In NX, you cannot draw a rectangle from its center. (T/F)

EXERCISES

Exercise 1

Draw a sketch for the base feature of the model shown in Figure 2-63. The sketch to be drawn is shown in Figure 2-64. **(Expected time: 30 min)**

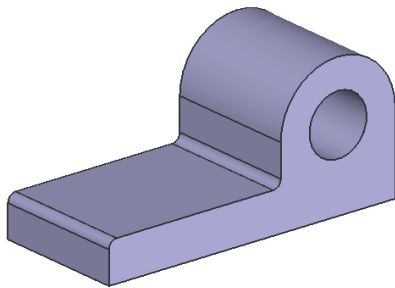


Figure 2-63 Model for Exercise 1

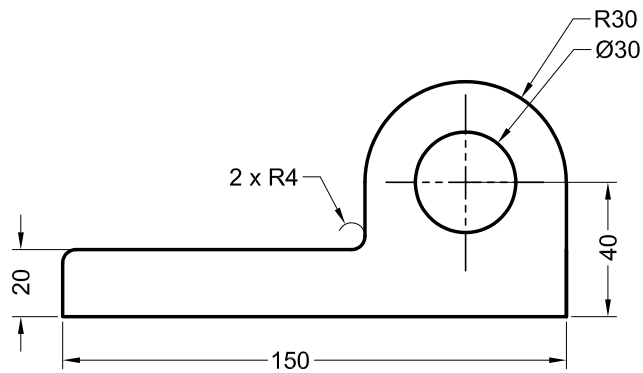


Figure 2-64 Sketch for Exercise 1

Exercise 2

Draw a sketch for the base feature of the model shown in Figure 2-65. The sketch to be drawn is shown in Figure 2-66. (Expected time: 30 min)

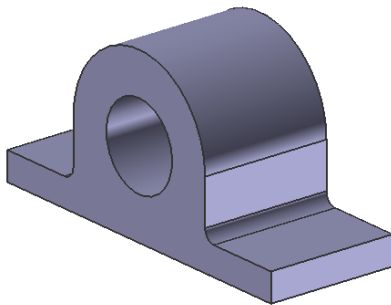


Figure 2-65 Model for Exercise 2

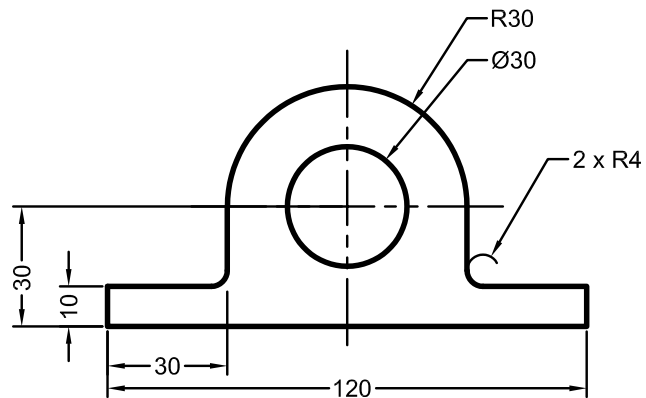


Figure 2-66 Sketch for Exercise 2

Answers to Self-Evaluation Test

1. Orient View to Sketch, 2. Arc, 3. Fillet, 4. Ellipse, 5. From Center, 6. Finish Sketch, 7. T, 8. F, 9. T, 10. T